


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/30/09	

APPROVED: _____
 DATE: _____ TITLE: _____

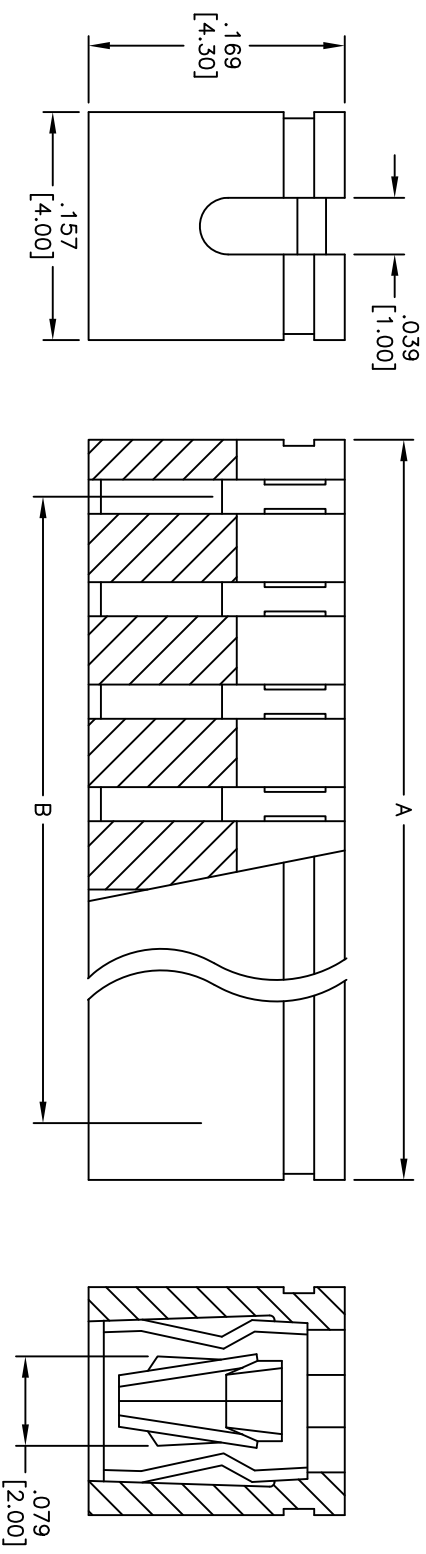

SPECIFICATIONS:
 Material: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 2 Amp max
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 650 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant

Positions: 2 thru 11
 A = .079 [2.00] x No. of Positions
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010
 APPROVALS
 DRAWN DY 10/30/09
 CHECKED
 APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] GANGED MINI SHUNT, OPEN TOP
 .169 [4.30] HEIGHT, GOLD PLATED

SIZE X PART NO. MS2BG-XX-G
 REF: S0007T SCALE: NTS SHEET 1 OF 1



6 5 4 3 2 1