


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/8/04	
A		REDRAWN	8/26/11	
B		REVISED SPEC.	06/13/12	

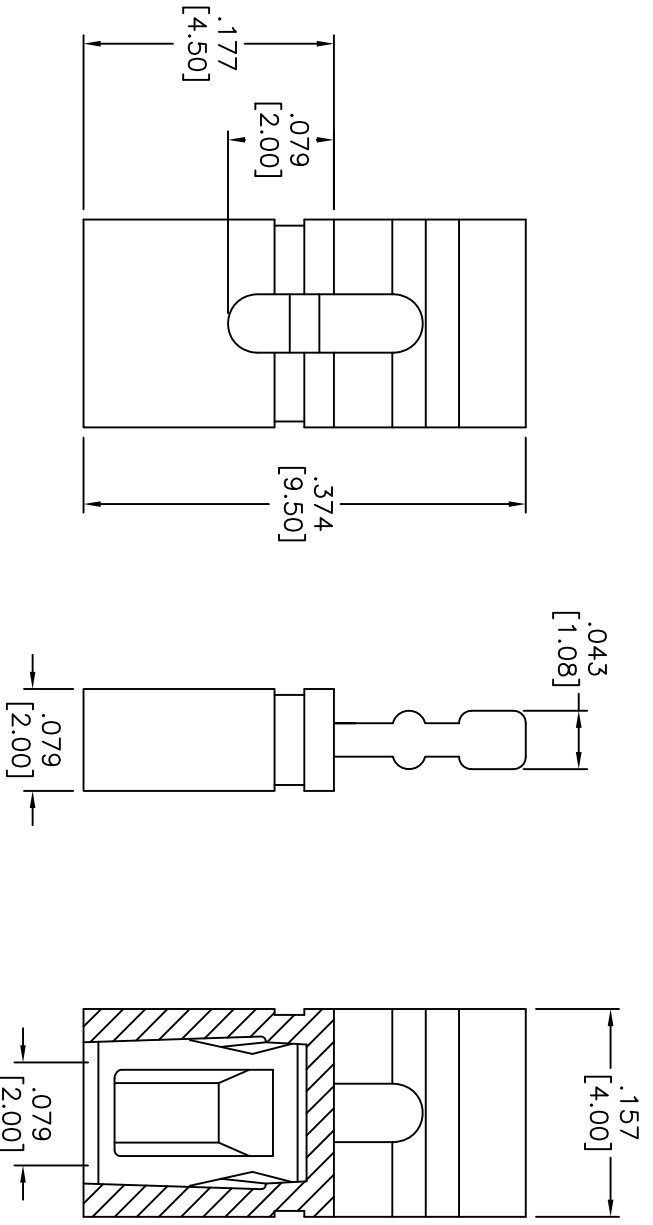

**SPECIFICATIONS:**

**Material:**  
 Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold Flash over Nickel underplate overall  
**Electrical:**  
 Current rating: 2 Amp max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 650 VAC for 1 minut  
**Temperature Rating:**  
 Operating temperature: -55°C to +105°C  
**Environmental:**  
 Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**MINI SHUNT, 374 [9.50] HANDLE,  
 GOLD PLATED**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS ±.10
INCHES	±.10
.X ±.10	±.015
.XX ±.020	±.010
.XXX ±.015	±.010
APPROVALS	DATE
DRAWN SS	11/8/04
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MS2H-1-G	B
REF:	S00076T	SCALE: NTS
SHEET 1	OF 1	