


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/14	

APPROVED: _____
 DATE: _____ TITLE: _____

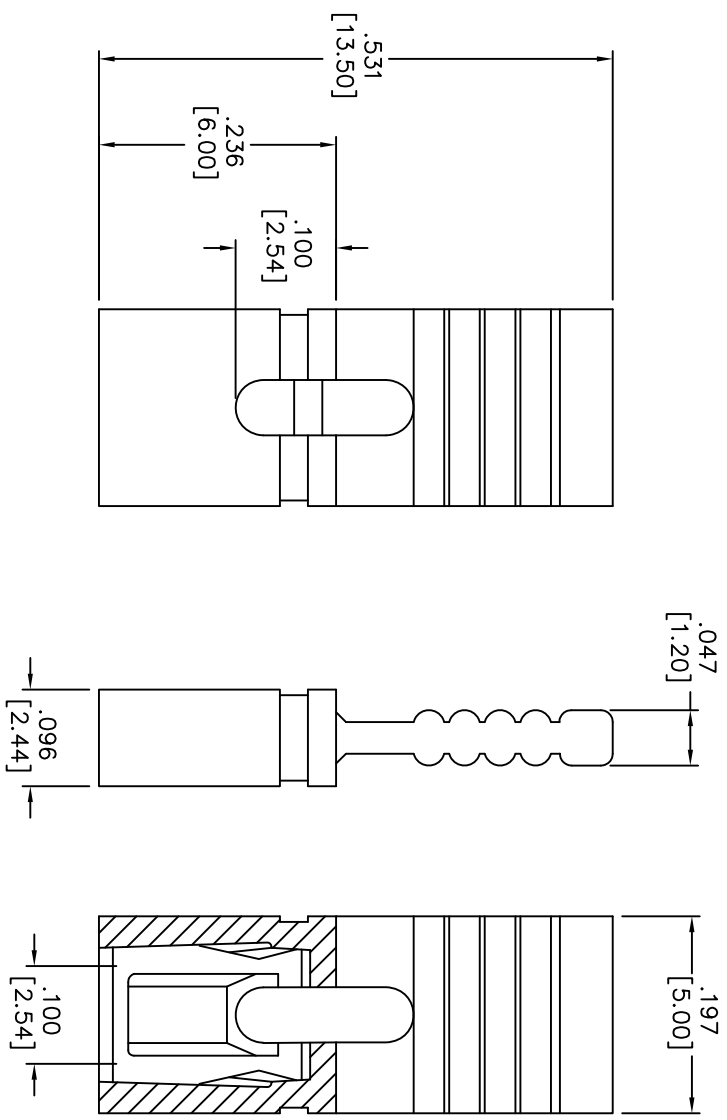

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: 30u" Gold over Nickel underplate overall
 Electrical:
 Current rating: 3 Amp max
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 650 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] MINI SHUNT, HANDLE TOP
 .531 [13.50] HEIGHT, 30u" GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		Holes		DATE	
.X	± .10	ØX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	HR	3/17/14			
CHECKED	SL	3/17/14			
APPROVED					
SIZE	PART NO.	MSBH-G-30		REV.	
X				-	
REF:	S00076T	SCALE:	NTS	SHEET	1 OF 1