

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/16	

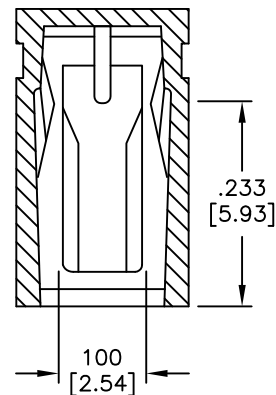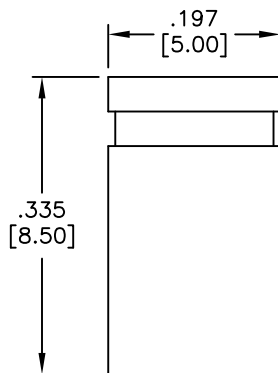

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

30u" Gold over Nickel underplate overall

Electrical:

Current rating: 3 Amp max

Contact resistance: 30 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 650 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN AY 6/22/16 CHECKED IC 6/22/16 APPROVED		TITLE .100 [2.54] MINI SHUNT, CLOSED TOP .335 [8.50] HEIGHT	
SIZE X	PART NO. MSDA-G-30	REF: S00076T	SCALE: NTS
		SHEET 1 OF 1	REV. -

6

5

4

3

2

1