
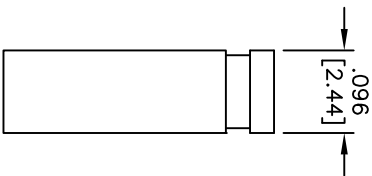
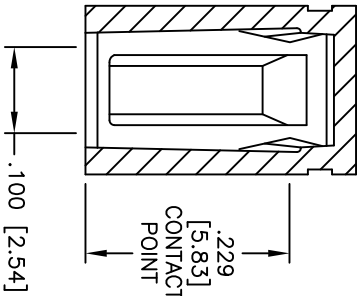
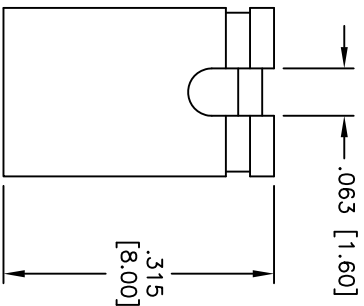


Rev	AWO #	Description	Date	Appr
-		RELEASED	05/16/13	

APPROVED: _____
 DATE: _____ TITLE: _____



SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: 15u" Gold over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amp max
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 650 VAC for 1 minute
 Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10
 .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010
 APPROVALS DATE

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] MINI SHUNT, OPEN TOP
 .315 [8.00] HEIGHT

APPROVALS	DATE
DRAWN TW	05/16/13
CHECKED LW	05/16/13
APPROVED	

SIZE	PART NO.	SCALE	SHEET	REV.
X	MSDB-G-15	NTS	1 OF 1	-