

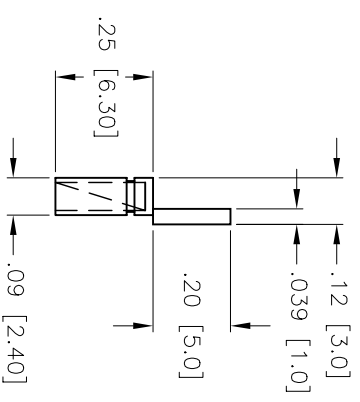
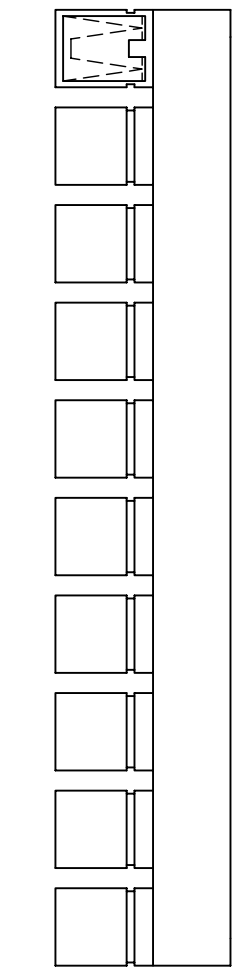


Rev	Req#	Description	Date	Appr
-	14013	Released	11/13/01	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

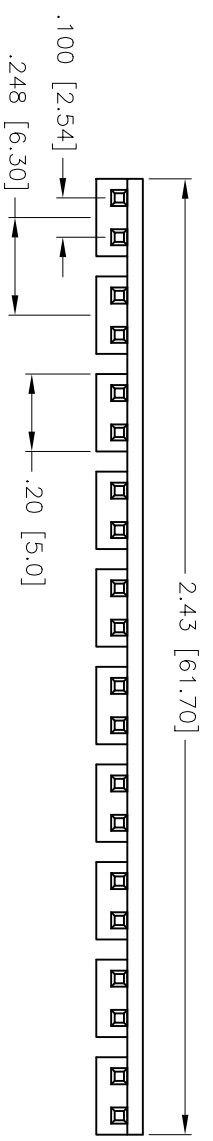

**SPECIFICATIONS:**

**Material:**

Insulator: PBT  
 Contacts: Brass  
 Color: Black

**Plating:**

Tin Overall on contact area over 50 μin nickel underplate.

**Electrical:**

Current rating: 3 Amps max.  
 Contact resistance: 12m Ω max.  
 Insulation resistance: 1G Ω min  
 Dielectric voltage: 250V AC for one minute  
**Environmental:**  
 Operating temperature: -55°C TO +105°C

**ADAM TECH**

Dimensions: in [mm]

Tolerances: Except As Noted

.XX ± .010  
 .XXX ± .005

DRAWN: WGM

APPR:

Date: 11/13/01 SCALE: NTS

**DESCRIPTION:**  
 Mini Shunt, 10 Piece Strip

**PART NUMBER:**  
 MST - T

SHEET	LOG	REF.	REV.
1 of 1			-