

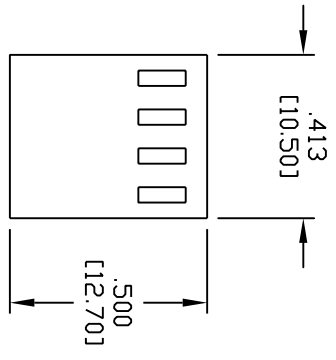


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/07/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

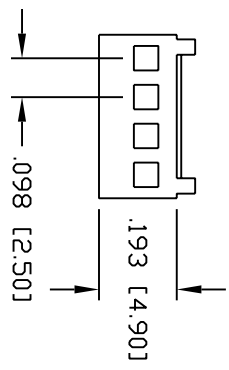

**SPECIFICATIONS:**

**Material:**

Insulator: Nylon 66, Rated UL 94V-0  
 Insulator color: White  
 Contacts: Brass

**Plating:** Tin over Copper underplate overall

**Electrical:**

Operating voltage: 250 VAC max.  
 Current rating: 3 Amps max.  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC / minute.

**Mechanical:**

Recommended PCB thickness: .063" (1.6mm)  
**Temperature Rating:**  
 Operating temperature: -25°C to +85°C

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES  
 .X ± .10 ØX ± .10  
 .XX ± .020 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010  
 APPROVALS DATE

DRAWN	SS	03/07/05
CHECKED		
APPROVED		

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HOUSING, LOCKING TYPE, .098 CENTERS  
 4 POSITION

SIZE	PART NO.	REV.
X	MTA-04-W	-
REF:	SCALE: NTS	SHEET 1 OF 1