
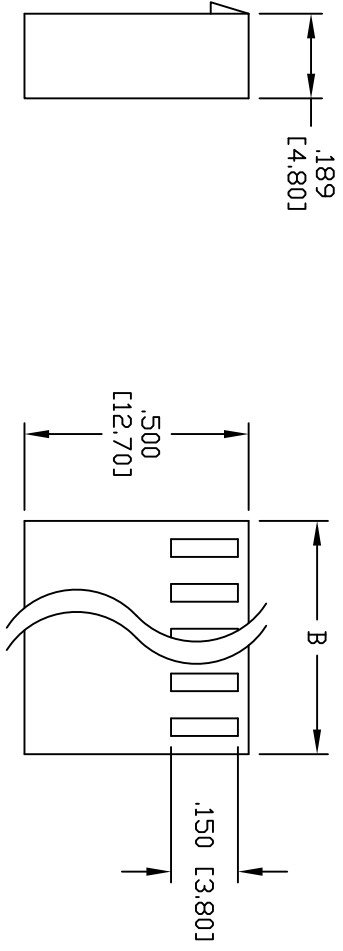


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/19/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

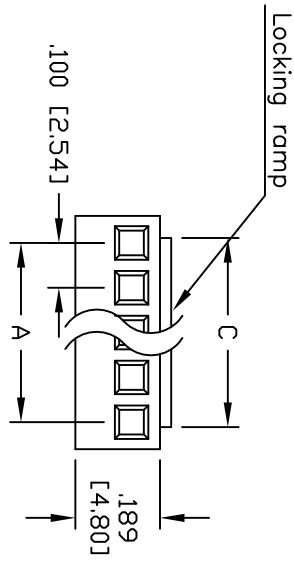

A=.100 [2.54] X No. of Spaces  
 B=.100 [2.54] X No. of Spaces + .120 [3.06]  
 C=.100 [2.54] X No. of Spaces + .022 [0.56]

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HOUSING, PITCH .100 [2.54], UL94V-0  
 NO POLARIZING RIB, WITH LOCKING RAMP

**SPECIFICATIONS:**  
**Material:** Insulator: Nylon 66, Rated UL 94V-0  
 Insulator color: Brown  
 Contacts: Brass  
**Plating:** Tin over Copper underplate overall  
**Electrical:**  
 Operating voltage: 250 VAC max.  
 Current rating: 3 Amps max.  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1500 VAC / minute.  
**Temperature Rating:**  
 Operating temperature: -40°C to +105°C



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ±.10	ØXX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	
DRAWN AY	11/19/10
CHECKED VW	11/19/10
APPROVED	

REF: S00123T	SCALE: NTS	SHEET 1 OF 1
SIZE X	PART NO. MTA-XX-NR-V0-BRN	REV. -