
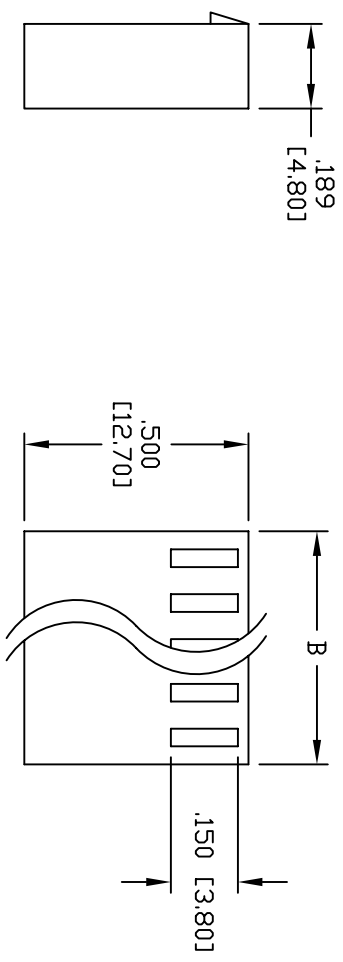


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/25/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

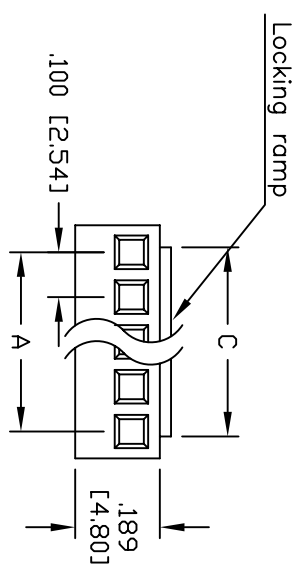

A=	B=	C=	No. of Spaces	No. of Spaces + .120	No. of Spaces + .022
.100 [2.54]	.100 [2.54]	.100 [2.54]	X	X	X
			No.	No.	No.

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HOUSING, PITCH .100 [2.54], UL94V-0  
 NO POLARIZING RIB, WITH LOCKING RAMP

**SPECIFICATIONS:**  
**Material:** Insulator: Nylon 66, Rated UL 94V-0  
 Insulator color: White  
 Contacts: Brass  
**Plating:** Tin over Copper underplate overall  
**Electrical:**  
 Operating voltage: 250 VAC max.  
 Current rating: 3 Amps max.  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1500 VAC / minute.  
**Temperature Rating:**  
 Operating temperature: -40°C to +105°C



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	7/25/08
CHECKED	
APPROVED	

SIZE	PART NO.	SCALE	NTS	SHEET 1 OF 1
X	MTA-XX-NR-V0			
REV.				