
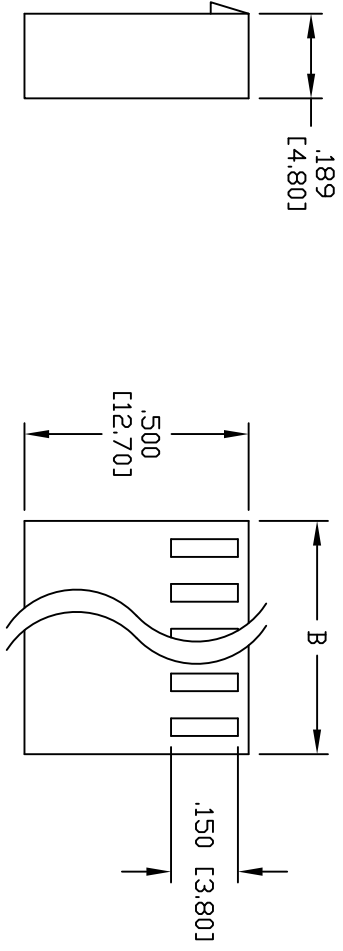


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/14/12	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

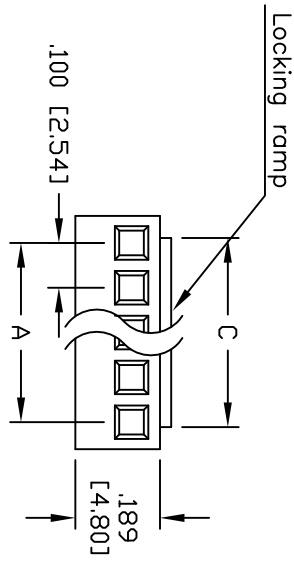

**SPECIFICATIONS:**

**Material:**

Insulator: Nylon 66, Rated UL 94V-2  
 Insulator color: White  
 Contacts: Brass

**Plating:**

Tin over Copper underplate overall

**Electrical:**

Operating voltage: 250 VAC max.  
 Current rating: 3 Amps max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1500 VAC / minute.

**Environmental:**

Lead free, RoHS compliant.

A=	B=	C=	No. of Spaces	No. of Spaces + .120	No. of Spaces + .022
.100 [2.54]	.100 [2.54]	.100 [2.54]	X	X	X
			No.	No.	No.

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HOUSING, PITCH .100 [2.54], UL94V-0  
 NO POLARIZING RIB, WITH LOCKING RAMP

UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED			
INCHES	HOLES	INCHES	HOLES
.X ± .10	Ø.X ± .10	.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010		
APPROVALS		DATE	
DRAWN AY		12/14/12	
CHECKED AH		12/14/12	
APPROVED			

SIZE	PART NO.	REV.
X	MTA-XX-NR	-

REF: S00016T SCALE: NTS SHEET 1 OF 1



6 5 4 3 2 1