
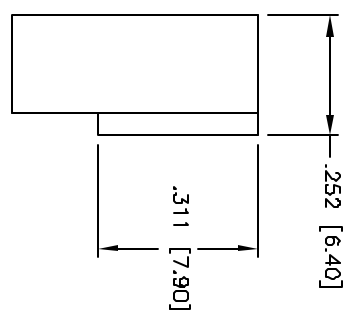
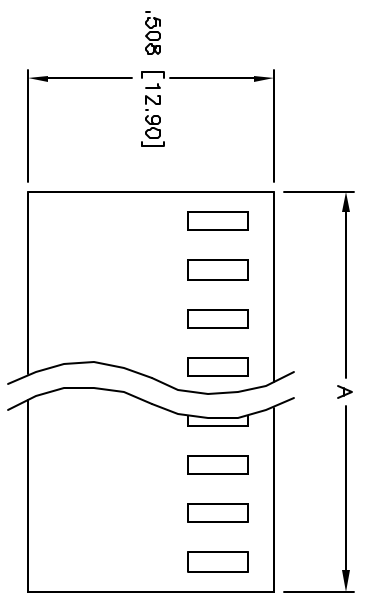


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/05	

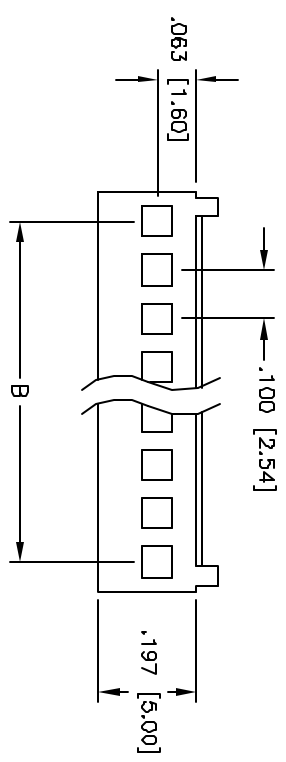

Positions: 2 thru 20  
 A = .100 [2.54] x No. of Positions + .021 [0.54]  
 B = .100 [2.54] x No. of Spaces

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 2 Amps max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NICHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.10	±.10
±.020	±.019
±.015	±.010
APPROVALS	DATE
SS	4/8/05

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
**.100 [2.54] WIRE HOUSING**

DRAWN	CHECKED	APPROVED	SIZE	PART NO.	SCALE	SHEET	REV.
			X	MTA-XX	NTB	1 OF 1	-