

6

5

4

3



2

1



APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/16	

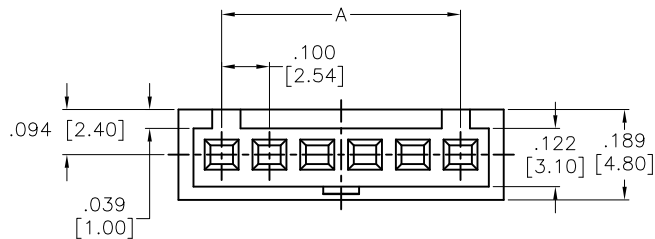

SECTION B-B

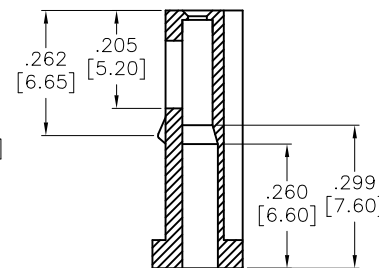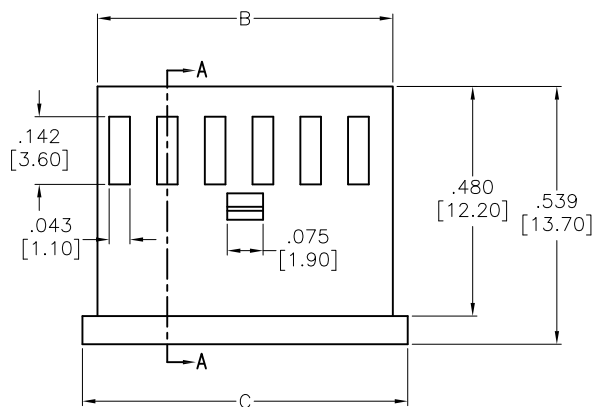

SECTION A-A

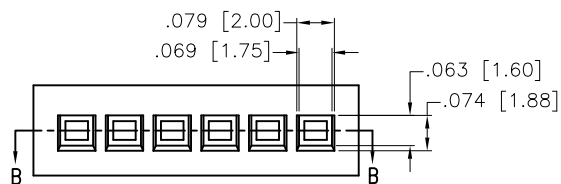

Positions: 02, 04, 06, 08, 09, 10, 12, 15, 22

A = .100 [2.54] x No. of Spaces

B = .100 [2.54] x No. of Positions + .020 [0.52]

C = .100 [2.54] x No. of Positions + .080 [2.02]

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Electrical:

Rated Current: 3 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC/DC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	∅X ± .10
.XX ± .020	∅XX ± .015
.XXX ± .015	∅XXX ± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] WIRE HOUSING, SINGLE ROW

APPROVALS		DATE
DRAWN	AY	7/21/16
CHECKED	OC	7/21/16
APPROVED		

SIZE X	PART NO. MTAB1-XX-V0	REV. -
REF: S00019C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1