

6

5

4




3

2

1

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/09	
A		UPDATE SPEC.	11/6/15	AY/TW

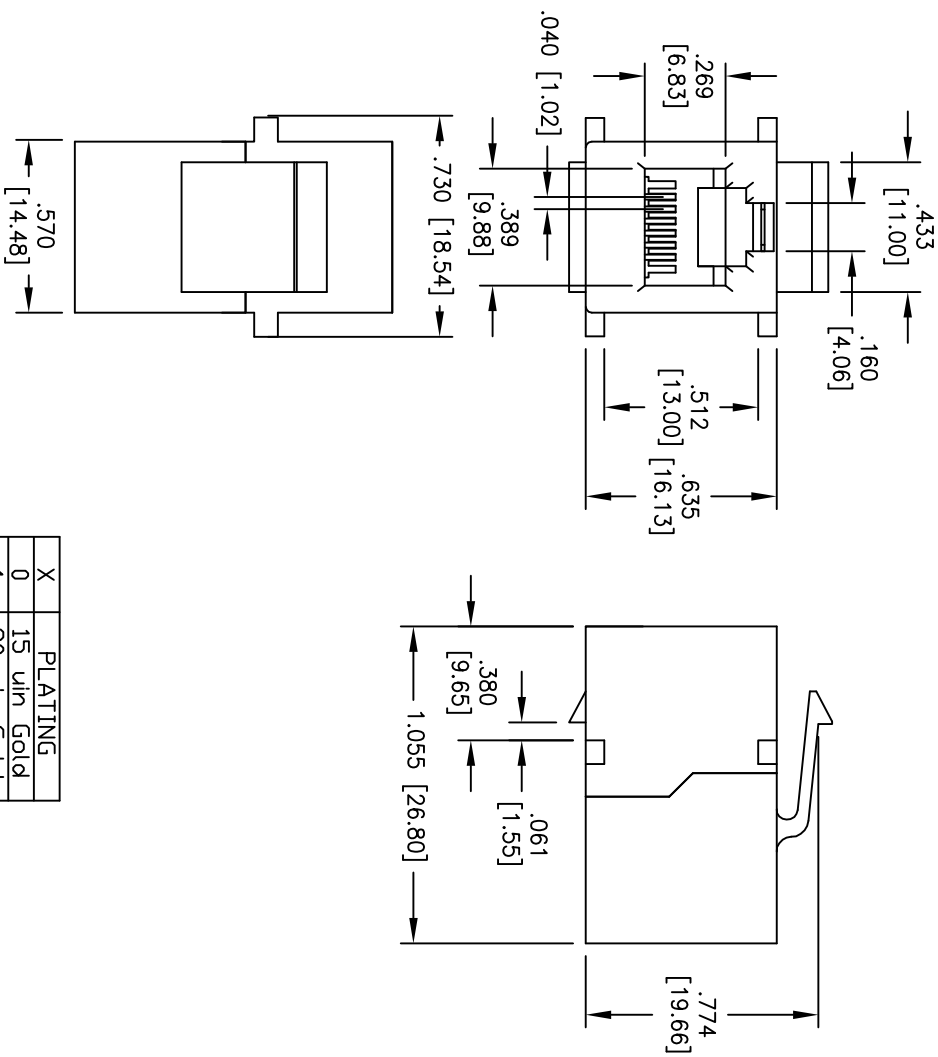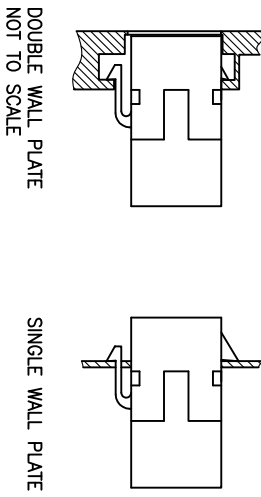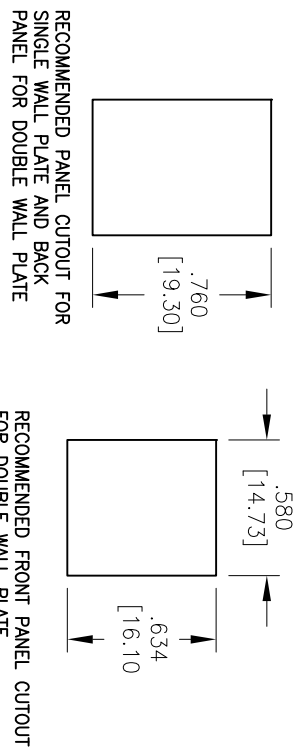

X	PLATING
0	15 uin Gold
1	30 uin Gold
2	50 uin Gold

**SPECIFICATIONS:**

- Material: PBI, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating:
- Flat contact: Gold over Nickel underplate on contact area, Tin over Copper underplate on solder tails
- Round contact: Gold over Nickel underplate overall (See chart for thickness)

**Electrical:**

- Operating voltage: 125 VAC max.
- Current rating: 1.5 Amps max.
- Contact resistance: 20 mohms max.
- Insulation resistance: 1000 Mohms min. @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +85°C
- Environmental: Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED

.X ± 2.54  
.XX ± .508  
.XXX ± .381

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

**MODULAR TELEPHONE JACK COUPLER**  
6P6C, PANEL MOUNT, COLOR BLACK

APPROVALS	DATE
DRAWN DY	4/13/09
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	REV.
MODULAR TELEPHONE JACK COUPLER	X	MTJC-66-X-B	A

REF: S00005C SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1