
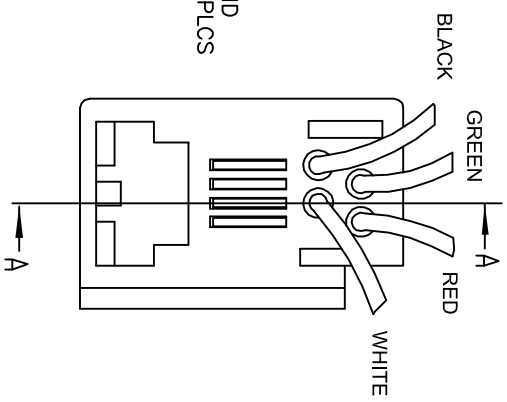
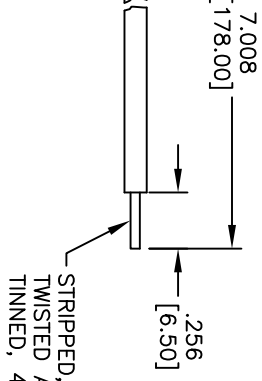
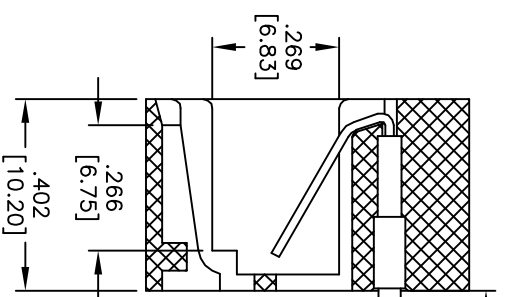
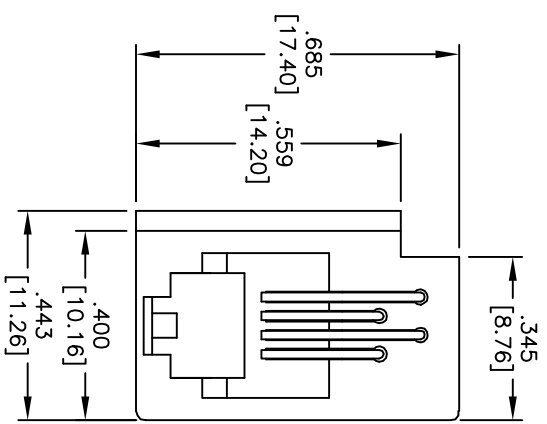


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/16/09	

APPROVED: _____
 DATE: _____ TITLE: _____



A-A

X	PLATING
0	15 μin Gold
1	30 μin Gold
2	50 μin Gold

SPECIFICATIONS:
 Material: Insulator: ABS, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Wires: 26 AWG, Stranded, UL 1061, PVC insulated
 Plating: Gold over Nickel underplate on mating area
 Electrical: Operating voltage: 150 VAC max.
 Current rating: 1.5 Amps max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 10 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +125°C
 Environmental: Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED TELEPHONE JACK, 616E, 4P4C, 26AWG, STRIPPED, COLOR BLACK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
	6/16/09

SIZE	PART NO.	REV.
X	MTJP-616E-XA1-1	-
REF:	S00005C	
SCALE:	NTS	
SHEET	1 OF 1	