
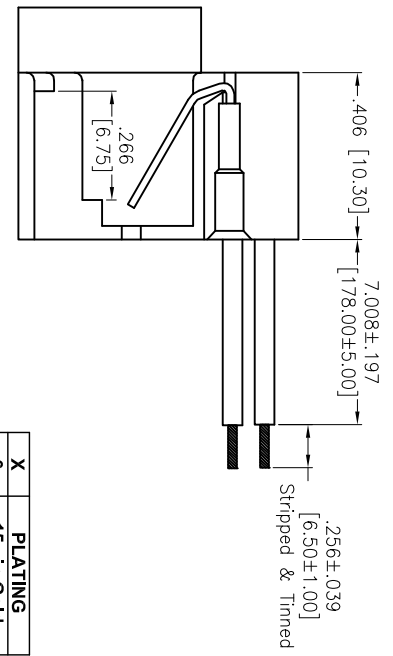






Rev	AWO #	Description	Date	Appr
-		RELEASED	4/20/04	
A		UPDATED DRAWING	4/22/15	HR/LL

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

THIS IS A CUSTOM CABLE PRODUCT THAT IS NON-CANCELABLE / NON-RETURNABLE

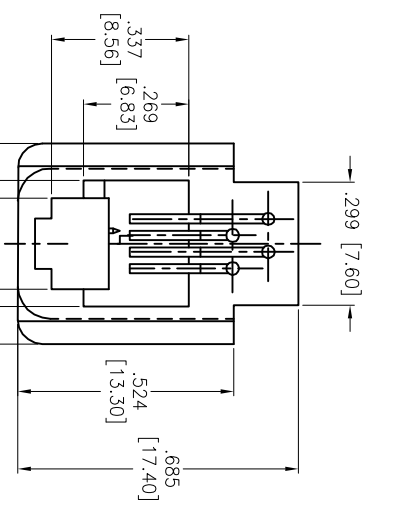

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

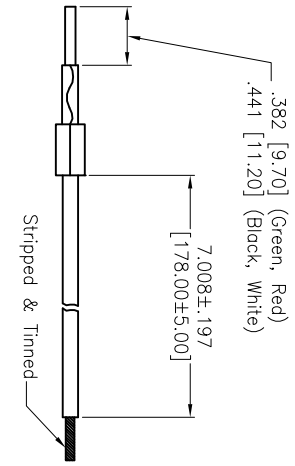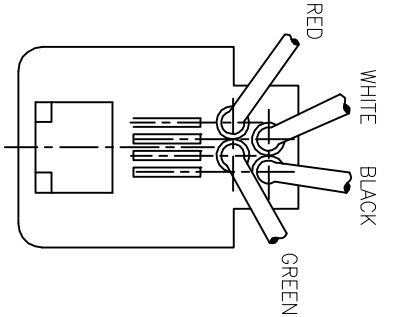

**SPECIFICATIONS:**

Material:  
 Insulator: ABS, rated UL 94V-0  
 Insulator color: Gray  
 Contacts: Phosphor Bronze  
 Wire: 26AWG, UL1061  
 Plating:  
 Gold over Nickel underplate on mating area.  
 (See plating chart for thickness)  
 Electrical:  
 Operating voltage: 125 VAC max  
 Current rating: 1.5 Amps max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1,000 VAC or 1,500 VDC for 1 minute  
 Environmental:  
 Operating temperature: -0°C to +70°C  
 Lead free, RoHS compliant.

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

WIRE LEADED PHONE JACK, TYPE 616M,  
 7" WIRE LEADS, STRIPPED 1/4" AND TINNED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
.X	±.10
.XX	±.020
.XXX	±.015
.XXX	±.010
ØXX	±.10
ØXXX	±.015
ØXXX	±.010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

TITLE	
SIZE	PART NO.
X	MTJP-616M-X-A1-2
REF:	S00005C
SCALE:	NTS
SHEET	1 OF 1

