
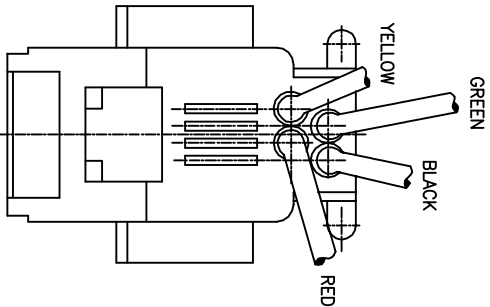
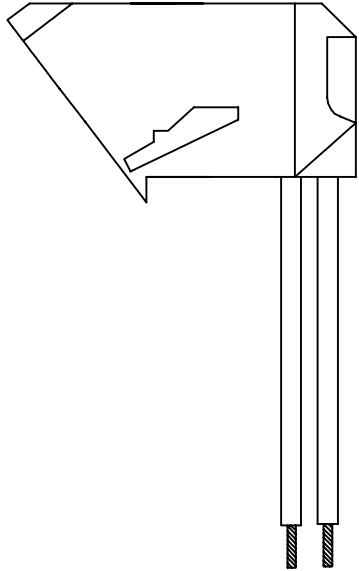


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/11/13	

APPROVED: _____
 DATE: _____ TITLE: _____

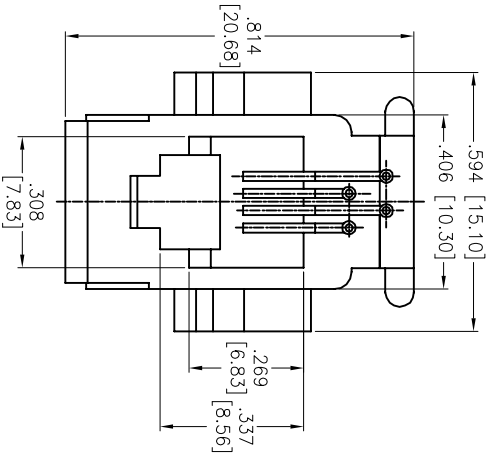

SPECIFICATIONS:

Material: Insulator: ABS, rated UL 94V-0
 Insulator color: Gray
 Contacts: Phosphor Bronze
 Wires: 26 AWG, Stranded, UL 1061, PVC insulated
 Plating: Gold over Nickel underplate on mating area
 Electrical: Operating voltage: 150 VAC max.
 Current rating: 1.5 Amps max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 10 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +125°C
 Environmental: Lead free, RoHS compliant

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

UNLESS OTHERWISE SPECIFIED			
ALL DIMENSIONS ARE INCHES [MM]			
TOLERANCES:	EXCEPT AS NOTED		
.X	±.10	ØXX	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXXX	±.010
APPROVALS		DATE	
DRAWN	TW	03/11/13	
CHECKED	EC	03/11/13	
APPROVED			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

WIRE LEADED TELEPHONE JACK, 616W, 4P4C, 26AWG, STRIPPED & TINNED

SIZE	PART NO.	REV.
X	MTJP-616W-X-A1-2	-

REF: S00036 SCALE: NTS SHEET 1 OF 1



6 5 4 3 2 1