



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/8/08	

APPROVED: _____
 DATE: _____ TITLE: _____

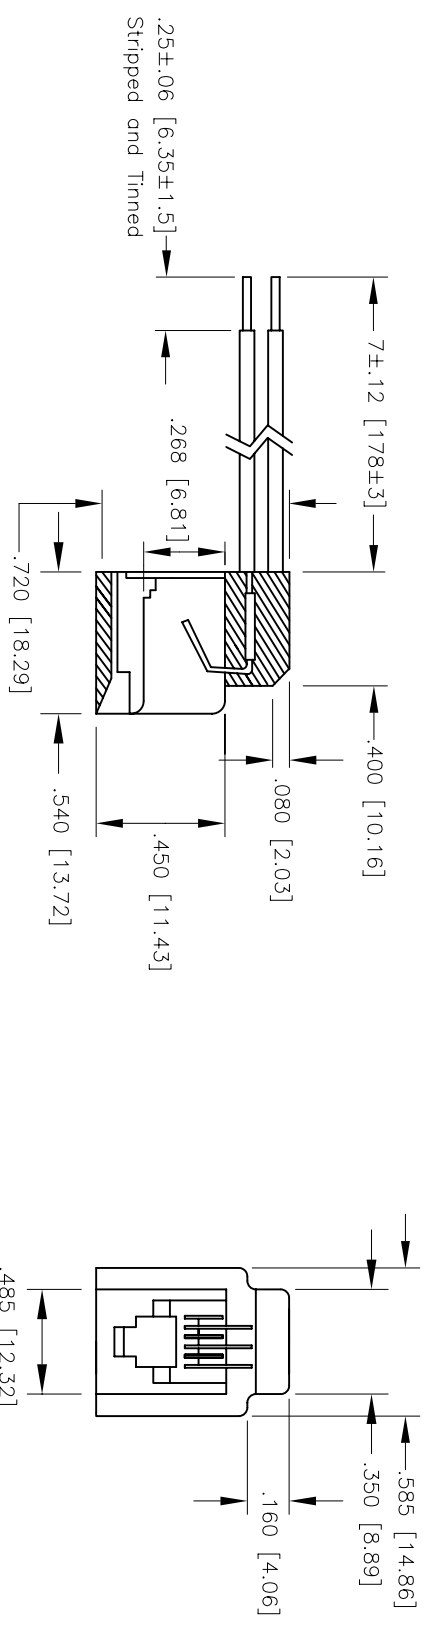

"X"	PLATING
0	15 μ" Gold
1	30 μ" Gold
2	50 μ" Gold



SPECIFICATIONS:

Material: Insulator: ABS, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Wires: 26 Awg, UL 1061, 80°C, VW-1, 300V
Plating:
 Gold over Nickel underplate on contact area.
 (See chart for thickness)

Electrical:

Operating voltage: 150 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +125°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XXX ± .015
 .XXX ± .015 Ø.XXXX ± .010

ADAM TECH

909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED JACK, 623 K6, BLACK
 7" LEADS, STRIPPED AND TINNED, .250"

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	SS		MT JP-623-K6-X-A1-1	
CHECKED				
APPROVED	1/8/08	X		

