
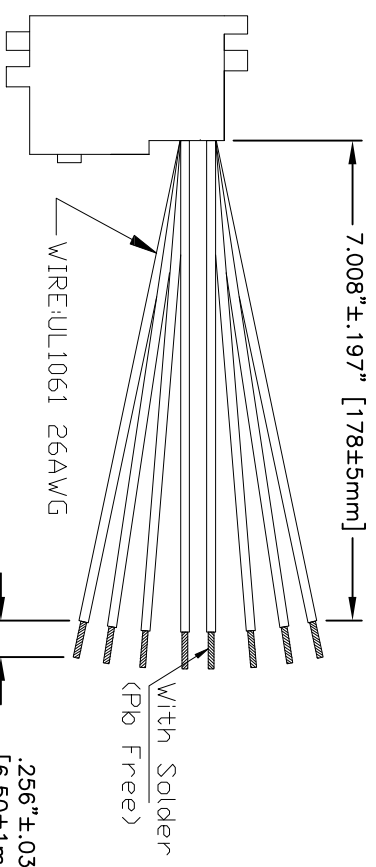
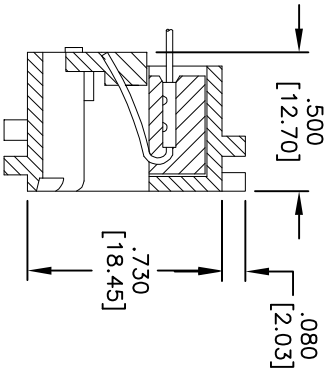



APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/12/06	
A		REDRAWN	9/23/11	

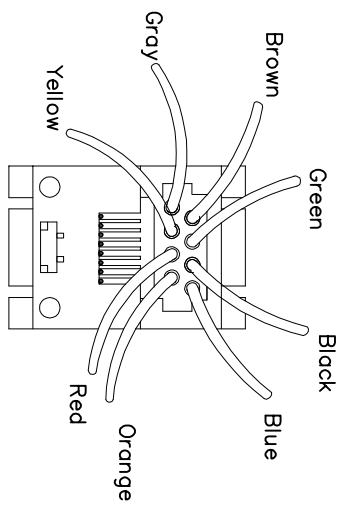

**SPECIFICATIONS:**

- Material: Insulator: ABS, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Wires: 26 AWG, Stranded, PVC insulated
- Plating: Gold over Nickel underplate on mating area. (See chart for thickness)
- Electrical: Operating voltage: 150 VAC max. Current rating: 1.5 Amps max. Contact resistance: 20 mohms max. initial Insulation resistance: 500 Mohms min. Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +125°C
- Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	01/12/06
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED TELEPHONE JACK, 26 AWG, 7" LEADS, .256 [6.50] STRIPPED & TINNED

SIZE: X PART NO.: MTP-641-XA1-1 REV: A

REF: S00020T SCALE: NTS SHEET 1 OF 1