
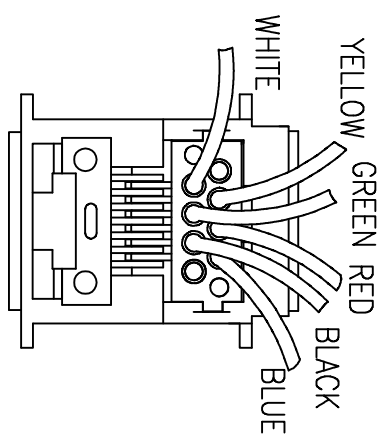


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/12/06	
A		REDRAWN	07/19/12	

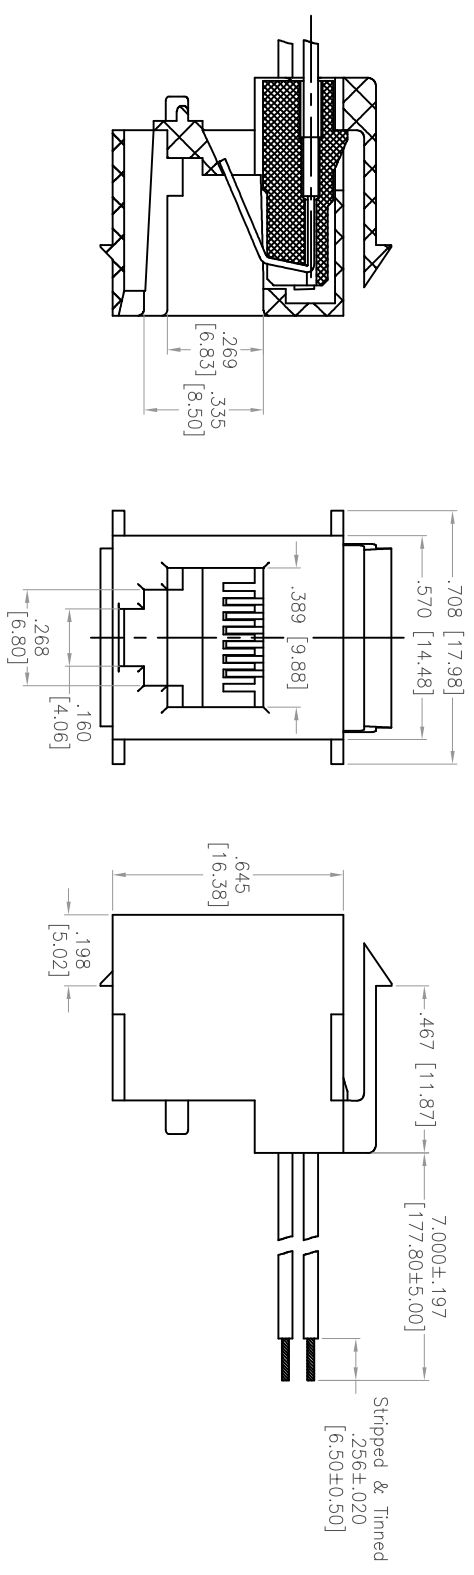

**SPECIFICATIONS:**

Material: Insulator: ABS, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Wires: UL1061, 26AWG.  
 Plating: Gold over Nickel underplate on mating area  
 Electrical: Insulation resistance: 1,000 Mohms min.  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Environmental: Lead free, RoHS compliant



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED TELEPHONE JACK, 26 AWG,  
 7" LEADS, .250 [.635] STRIPPED & TINNED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	01/12/06
CHECKED	
APPROVED	

SIZE X	PART NO. MTJP-648-K6-X-A1-1	REV. A
REF: S0003C	SCALE: NTS	SHEET 1 OF 1