

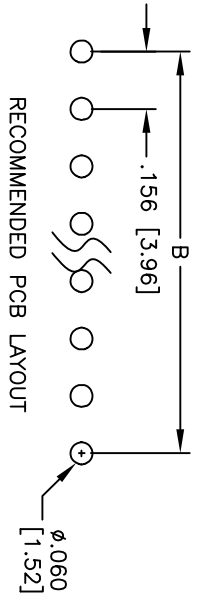


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/2/05	
A		REDRAWN	5/17/11	
B		ADDED SPEC.	6/5/13	
C		REVISED DIM.	10/24/13	AVYYC

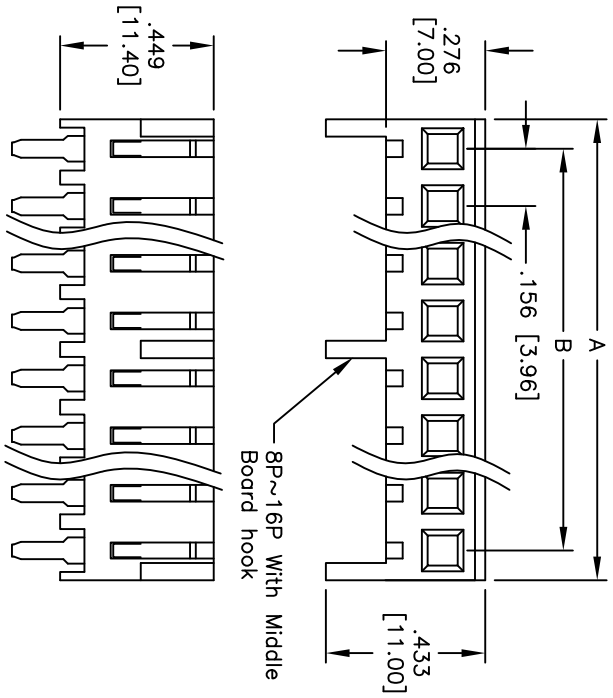

Positions: 02 thru 16
 A = .156 [3.96] x No. of Positions + .006 [0.14]
 B = .156 [3.96] x No. of Spaces

SPECIFICATIONS:

- Material: Nylon, rated UL 94V-2
- Insulator color: White
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical:
 - Operating voltage: 250 VAC max.
 - Current rating: 5 Amps max.
 - Contact resistance: 6 mohms max. initial
 - Insulation resistance: 50K Mohms min.
 - Dielectric withstanding voltage: 1,500 VAC for 1 minute
- Mechanical:
 - Recommended PCB thickness: 0.062" (1.57mm)
 - Operating temperature: 0°C to +75°C
 - Environmental: Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] PCB CONNECTOR, TOP ENTRY WITH BOARD HOOKS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZE	
.X	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	SS	6/2/05			
CHECKED					
APPROVED					
SIZE	PART NO.	SCALE: NTS		SHEET 1 OF 1	
X	PCD-A-XX			REV. C	
REF:	S00723T				