
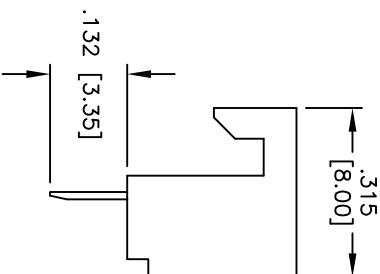
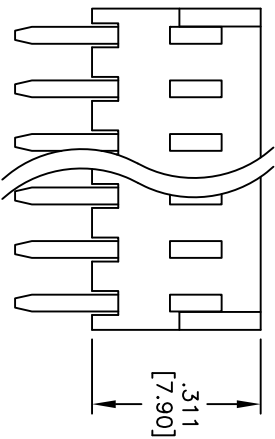
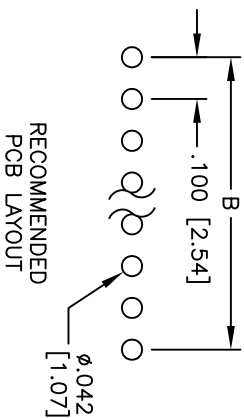


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/2/05	
A		REDRAWN	10/30/09	

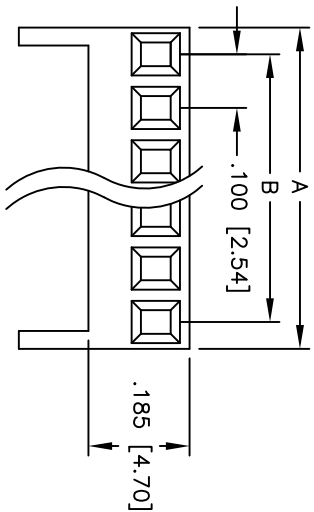

SPECIFICATIONS:
 Material: Nylon, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall

Positions: 02 thru 25
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 2.5 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,500 VAC for 1 minute

Mechanical:
 Recommended PCB thickness: 0.062" (1.57mm)
 Temperature Rating: Operating temperature: 0°C to +75°C
 Environmental: Lead free, RoHS compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] PCB CONNECTOR BOARD HOOKS, TOP ENTRY

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	6/2/05
CHECKED	
APPROVED	

SIZE X	PART NO. PCE-A-XX	REV. A
REF: S00123T	SCALE: NTS	SHEET 1 OF 1

