
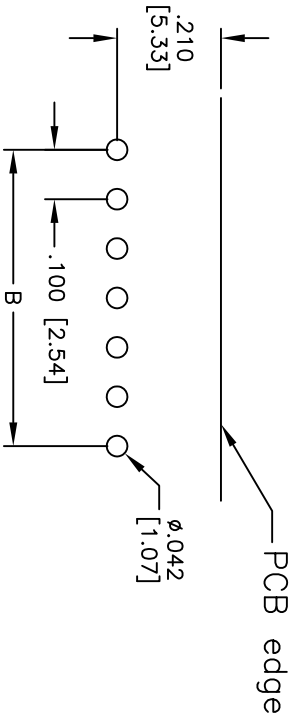
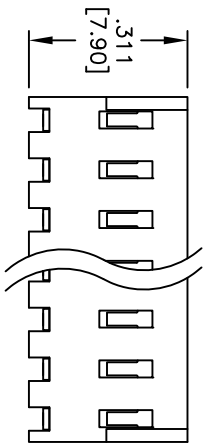



APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/2/05	
A		REDRAWN	10/5/11	

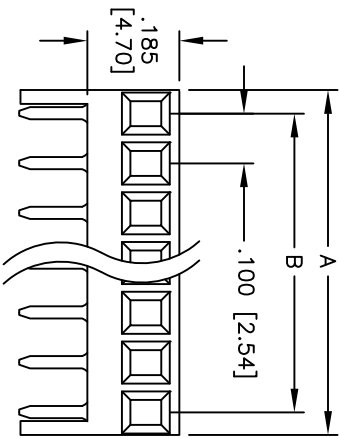

Positions: 02 thru 25  
 A = .100 [2.54] x No. of Spaces + .096 [2.44]  
 B = .100 [2.54] x No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: Nylon, rated UL 94V-0
- Insulator color: White
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max. Current rating: 2.5 Amps max. Contact resistance: 20 mohms max. Initial insulation resistance: 500 Mohms min. Dielectric withstanding voltage: 1,500 VAC for 1 minute
- Mechanical: Recommended PCB thickness: 0.062" (1.57mm)
- Temperature Rating: Operating temperature: 0°C to +75°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] PCB CONNECTOR BOARD HOOKS, SIDE ENTRY

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZES		DATE	
.X	± .10	ØXX	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015	ØXXX	± .010		
.XXX	± .015	ØXXXX	± .010	ØXXXX	± .010		
APPROVALS		DATE		DATE		DATE	
DRAWN	SS	6/2/05					
CHECKED							
APPROVED							
SIZE	PART NO.	PCE-B-XX		SCALE: NTS		SHEET 1 OF 1	
REF: S00123T							
REV. A							