

6

5

4




3

2



1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/13/04	
A		BU over OR was V over OR	8/17/04	

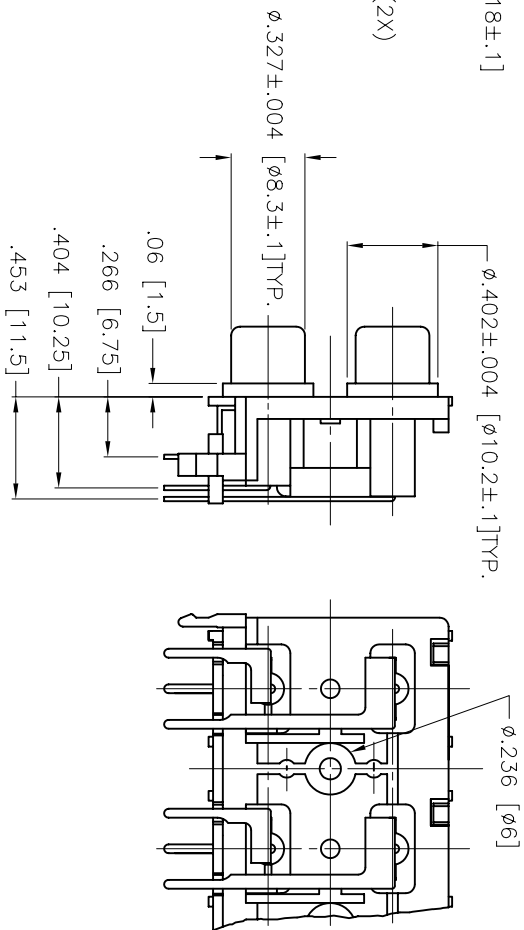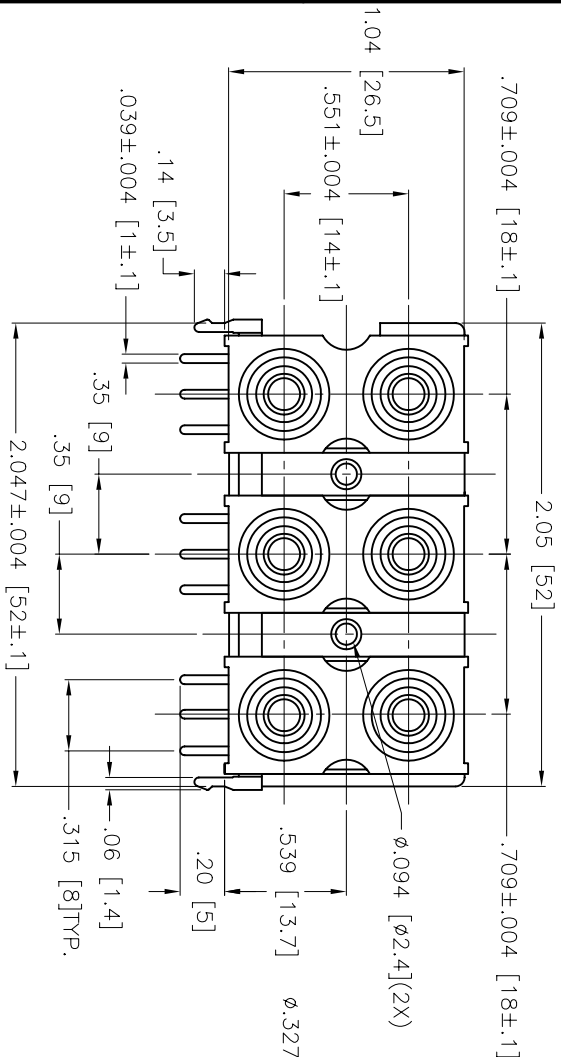

R = RED
 BU = BLUE
 W = WHITE
 G = GREEN
 OR = ORANGE
 B = BLACK

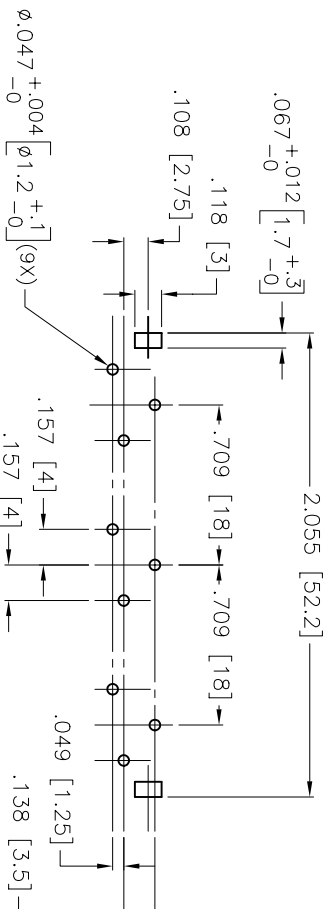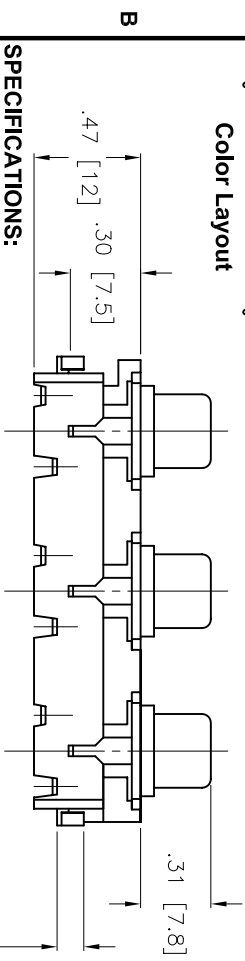

Recommended PCB Layout
 Tolerance: ±.004 [±.10]

SPECIFICATIONS:
 Insulator: ABS, rated UL94HB, Color: Black
 Barrels: Steel, Gold plated
 Contacts: Brass

Plating:
 Center Contacts: Tin Plated
 Outer Contacts: Nickel Plated

Electrical:

Voltage rating: 12V DC
 Current rating: 1 Amps DC or AC
 Contact resistance: 30 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +70°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 6 PORT STACKED, RIGHT ANGLE
 PCB, SPC COLORS, GOLD PL BARREL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES	±.10	ØXX	±.10
XX	±.020	ØXXX	±.015
XXX	±.015	ØXXXX	±.010
APPROVALS	DATE	SIZE	PART NO.
DRAWN	SS	8/13/04	RCA-114-SPC-G
CHECKED			
APPROVED		REF: X	SCALE: NTS
			SHEET 1 OF 1

6

5

4

3

2

1