

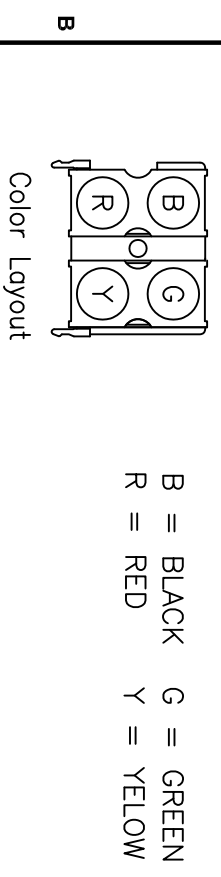


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

6 | 5 | 4 | 3 | 2 | 1

APPROVED: _____
 DATE: _____ TITLE: _____

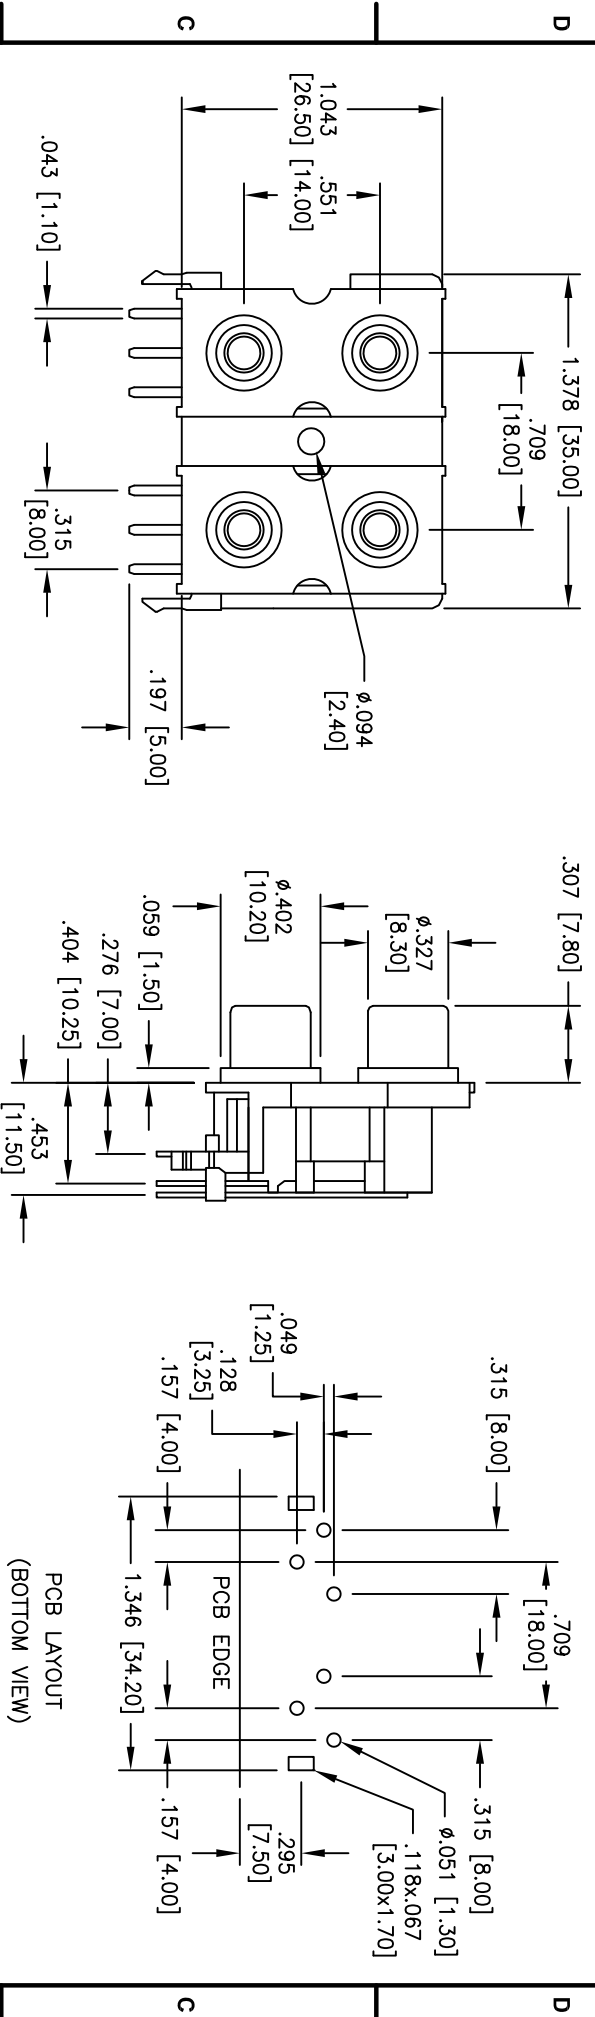

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator colors: Black, Red, Green, Yellow
 Bushing: Brass, Nickel plated
 Contacts: Brass
 Plating:
 Tin or Silver over Copper underplate

Electrical:
 Operating voltage: 12 VDC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 Mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

A

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 4 PORTS, 2 X 2

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES. [MM]		TITLE	
TOLERANCES: EXCEPT AS NOTED		RCA JACK, 4 PORTS, 2 X 2	
INCHES		SIZE PART NO.	
.XX ± .10		X RCA-104-B/R/G/Y	
.XX ± .020		SCALE: NTS	
.XXX ± .015		SHEET 1 OF 1	
.XXX ± .010		REV. -	
APPROVALS	DATE	REF:	
DRAWN SS	10/4/04		
CHECKED			
APPROVED			



6 | 5 | 4 | 3 | 2 | 1