

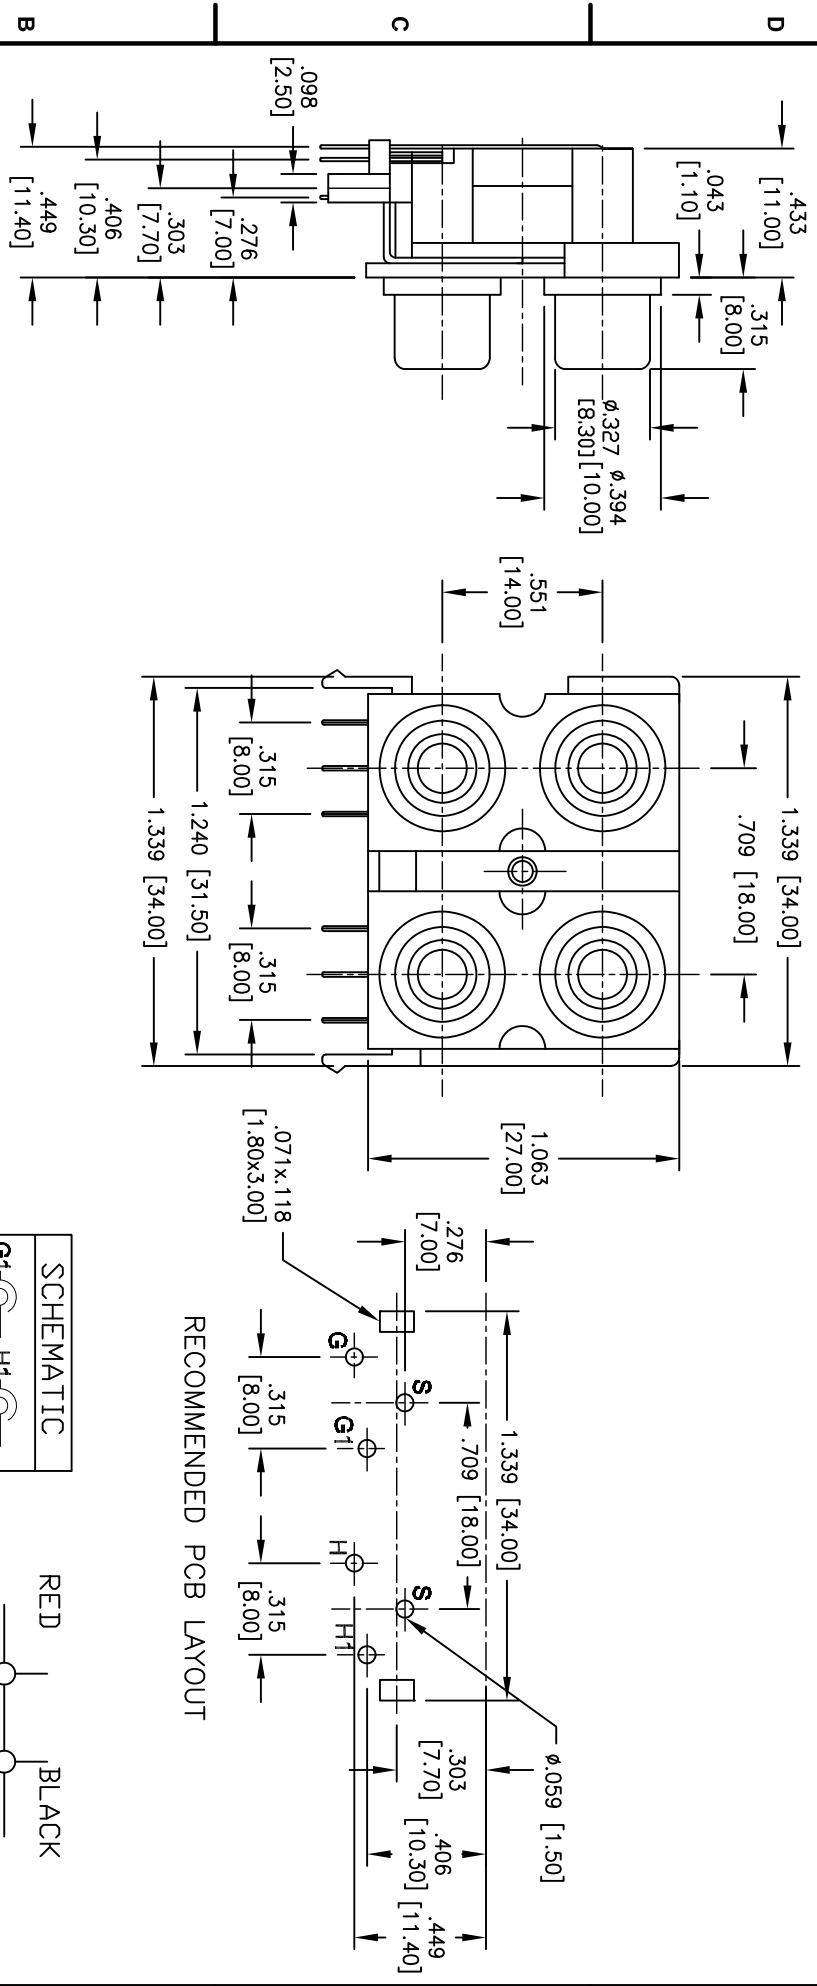



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/29/12	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



RECOMMENDED PCB LAYOUT

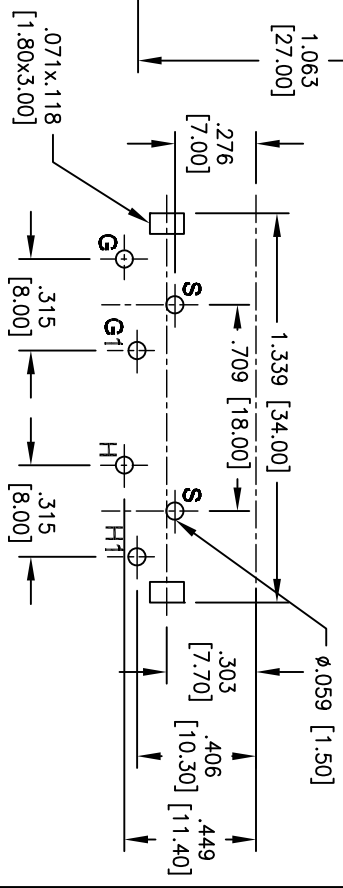

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, rated UL 94V-0  
 Insulator colors: Black  
 Cover: ABS, rated UL 94V-0, colors: Black  
 Washer: PBT, rated UL 94V-0  
 Washer colors: Red/Red/Black/Black  
 Bushing: Brass, Nickel plated  
 Contacts: Phosphor Bronze  
**Plating:**  
 Tin over Copper underplate overall  
**Electrical:**  
 Rated Voltage: 16 VDC max.  
 Rated Current: 0.3 Amp.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
**Environmental:**  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, 4 PORTS, 2 X 2

APPROVALS	DATE	SIZE	PART NO.	SCALE	SHEET	REV.
DRAWN AY	3/29/12	X	RCA-104-R/R/B/B	NTS	1 OF 1	-
CHECKED SC	3/29/12					
APPROVED						