


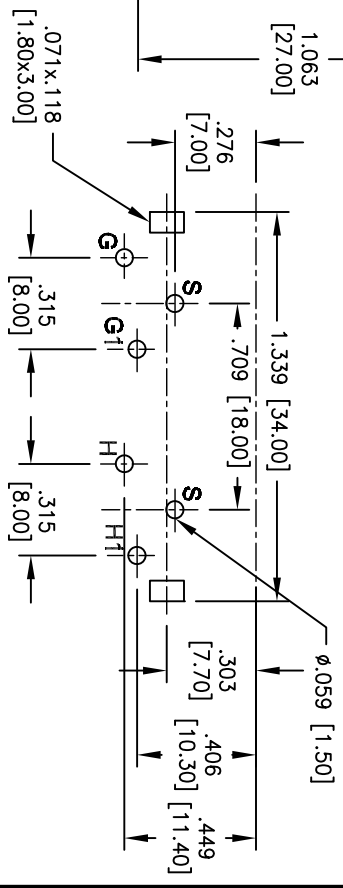


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/9/12	

APPROVED: _____
 DATE: _____ TITLE: _____

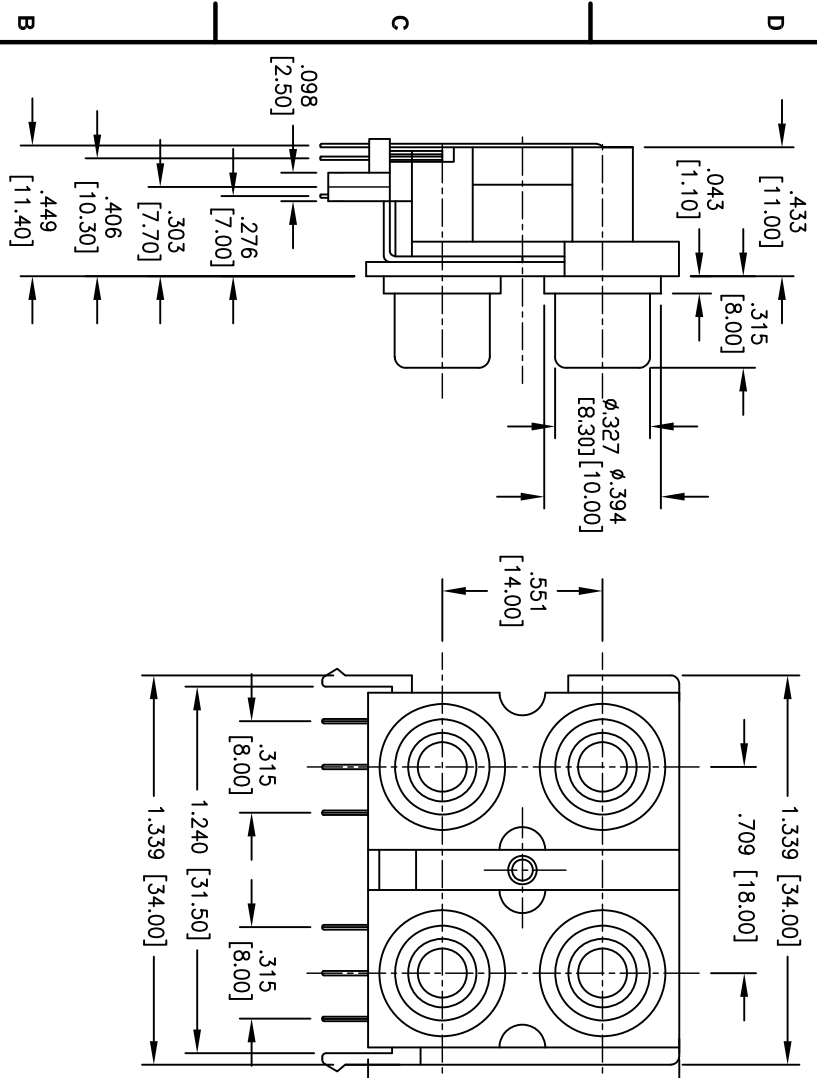

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator colors: Black
 Cover: ABS, rated UL 94V-0, colors: Black
 Washer: PBT, rated UL 94V-0
 Washer colors: White/Black/Red/Yellow
 Bushing: Brass, Nickel plated
 Contacts: Phosphor Bronze

Plating:
 Tin over Copper underplate overall

Electrical:
 Rated Voltage: 16 VDC max.
 Rated Current: 0.3 Amp.

Insulation:
 Contact resistance: 20 mohms max. initial
 Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	Holes
X ± .10	ϕ X ± .10
.XX ± .020	ϕ XX ± .015
.XXX ± .015	ϕ XXX ± .010

APPROVALS	DATE
DRAWN AY	3/9/12
CHECKED OC	3/9/12
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 4 PORTS, 2 X 2

SIZE	PART NO.	REV.
X	RCA-10-4-W/R/B/Y	-

REF.	SCALE:	NTS	SHEET	1 OF 1
SM0211T				