



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

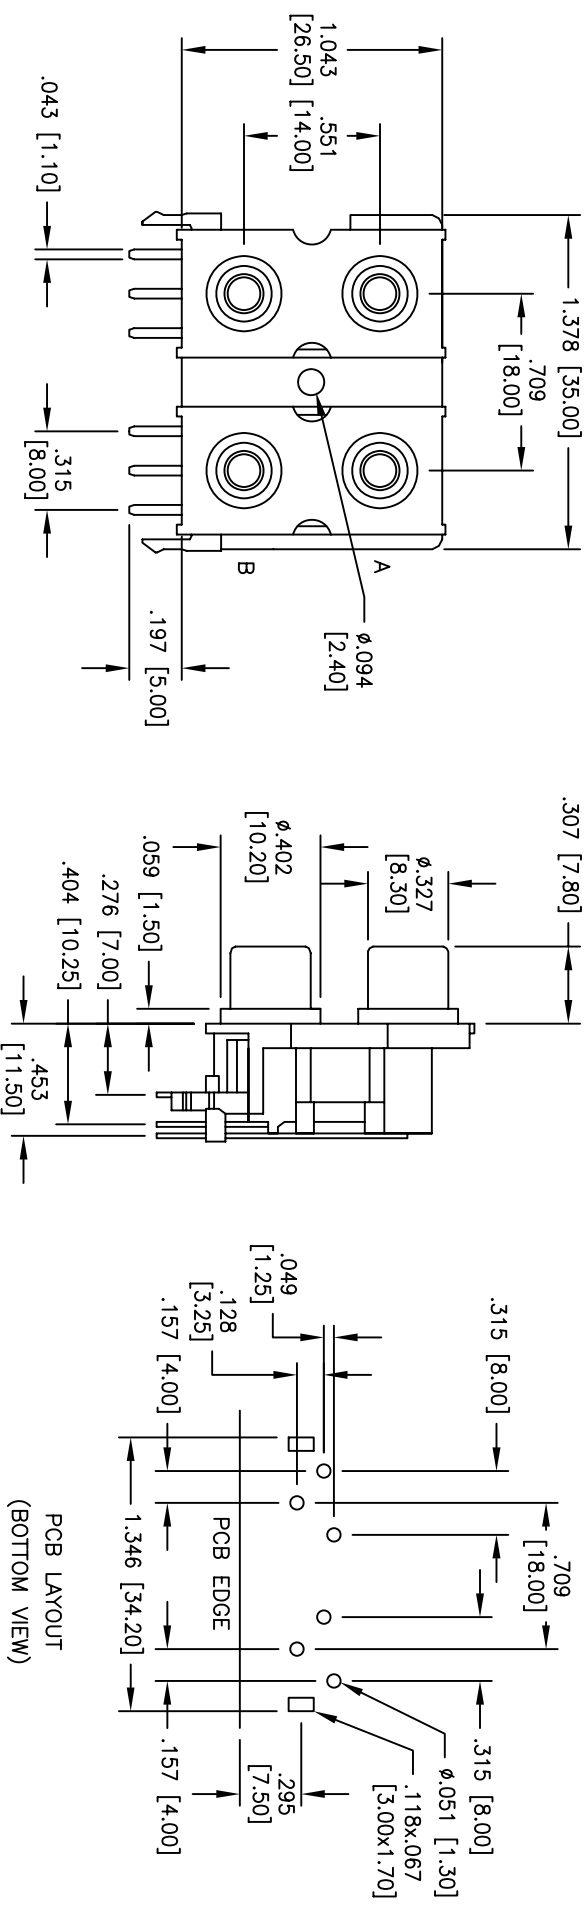

**SPECIFICATIONS:**  
**Material:**  
 Insulator: PBT, Glass reinforced, rated UL 94V-0  
 Insulator colors: Red, Black, Yellow, White  
 Bushing: Brass, Nickel plated  
 Contacts: Brass  
 Plating:  
 Tin or Silver over Copper underplate

**Electrical:**  
 Operating voltage: 12 VDC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -25°C to +85°C

**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.

COLOR = X (TOP PORT) / X = (BOTTOM PORT)

JACKS A & B CAN BE ANY COMBINATION OF AVAILABLE COLORS

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
X	± .10	ØXX	± .10	ØXXX	± .015
.XX	± .020	ØXXX	± .015	ØXXX	± .010
.XXX	± .015	ØXXX	± .010		

APPROVALS	DATE	TITLE
DRAWN SS	10/4/04	RCA JACK, 4 PORTS, 2 X 2, TOP/BOTTOM
CHECKED		SIZE PART NO. RCA-10-4-XX
APPROVED		SCALE: NTS SHEET 1 OF 1

