
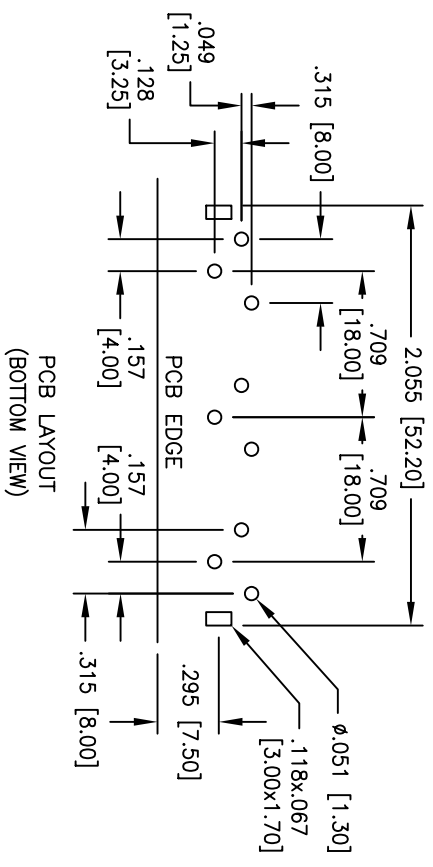
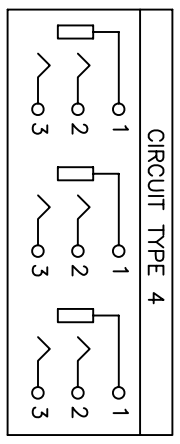


| Rev | AWO # | Description | Date   | Appr |
|-----|-------|-------------|--------|------|
| -   | 7574  | RELEASED    | 3/2/07 |      |

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

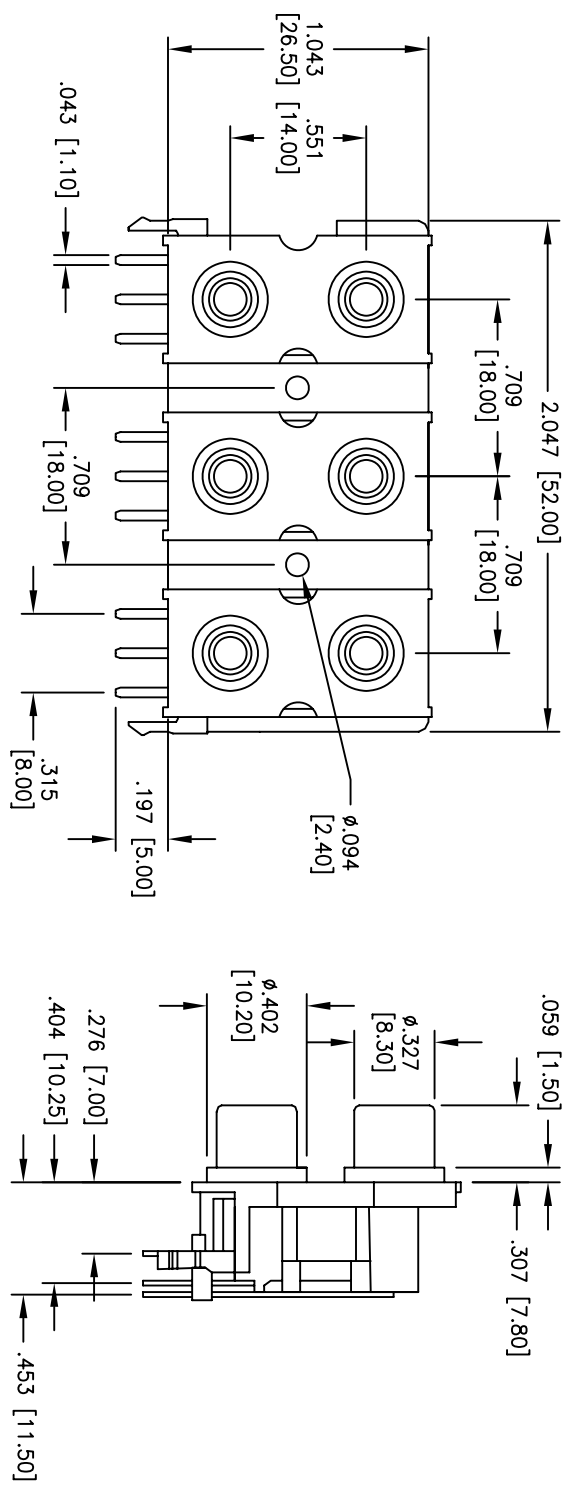

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, Glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Inserts: PBT, Color Black  
 Bushing: Brass, Nickel plated  
 Contacts: Brass  
 Barrels: Gold plated  
 Plating: Tin or Silver over Copper underplate

**Electrical:**  
 Operating voltage: 12 VDC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -25°C to +85°C

**Environmental:**  
 Lead free, RoHS Compliant  
 Recommended soldering temp: 235°C for 5 seconds

|                                |        |
|--------------------------------|--------|
| UNLESS OTHERWISE SPECIFIED     |        |
| ALL DIMENSIONS ARE INCHES [MM] |        |
| TOLERANCES: EXCEPT AS NOTED    |        |
| INCHES                         |        |
| X                              | ± .10  |
| .XX                            | ± .020 |
| .XXX                           | ± .015 |
| ØXX                            | ± .015 |
| ØXXX                           | ± .010 |
| APPROVALS                      | DATE   |
| DRAWN                          | BW     |
| CHECKED                        | 3/2/07 |
| APPROVED                       |        |

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, 6 PORTS, 2 X 3, LEFT/CENTER/RIGHT GOLD PLATED BARRELS

SIZE: PART NO. RCA-14-B/B/B-G

REV.:

SCALE: NTS SHEET 1 OF 1