


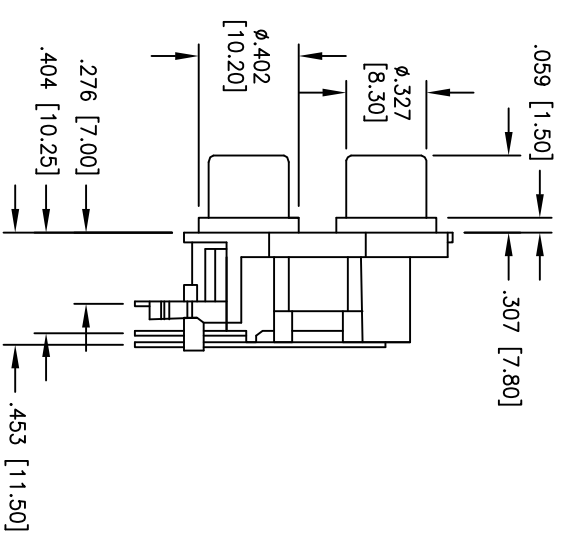
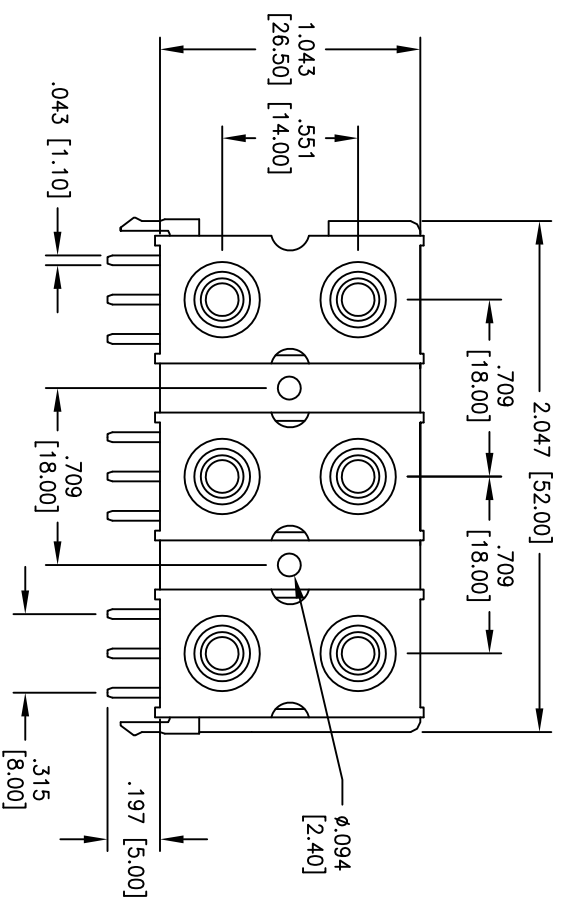


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/21/09	

APPROVED: _____
 DATE: _____ TITLE: _____

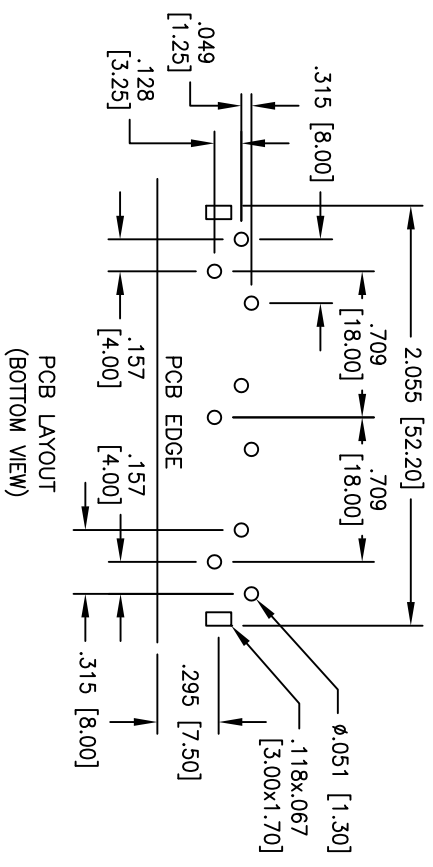

BL = BLUE Y = YELLOW
 R = RED W = WHITE
 G = GREEN

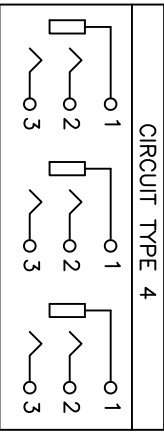

PCB LAYOUT
(BOTTOM VIEW)

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Inserts: PBT, Color Blue, Red, Green, Yellow, White
 Bushing: Brass, Nickel plated
 Contacts: Brass
 Plating:
 Tin or Silver over Copper underplate

Electrical:
 Operating voltage: 12 VDC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C

Environmental:
 Lead free, RoHS Compliant
 Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 6 PORTS, 2 X 3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		DATE	
X .XX ± .10	Ø .XX ± .015	APPROVALS	DATE
.XXX ± .015	Ø .XXX ± .010	DRAWN	DY
		CHECKED	
		APPROVED	
SIZE	PART NO.	SCALE:	SHEET 1 OF 1
X	RCA-114BLR/GYM/R	NTS	
REV.			