



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	7631	RELEASED	4/2/07	
-		REDRAWN	7/17/12	

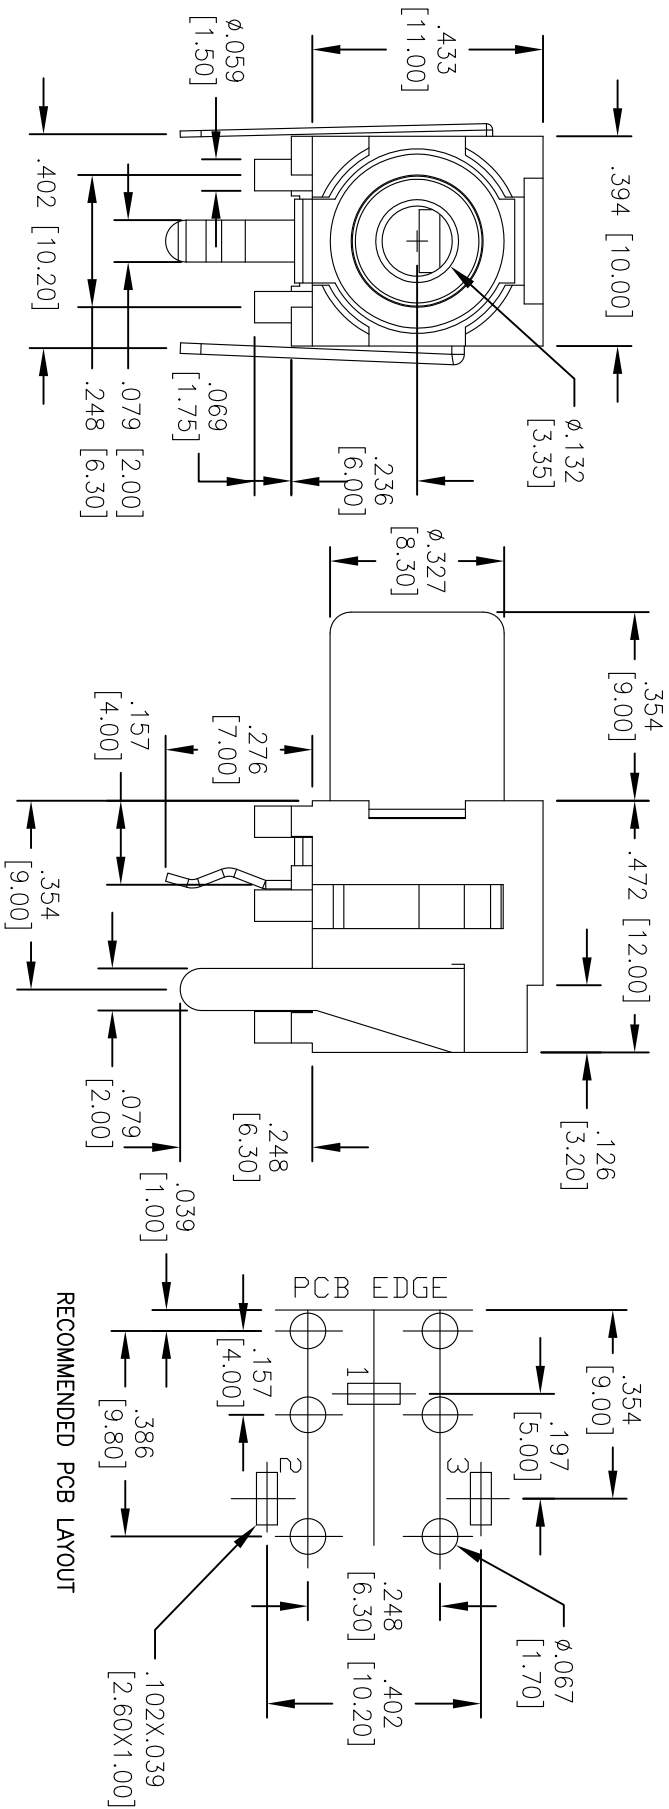

SPECIFICATIONS:

Material: PBT, glass reinforced thermoplastic, rated UL 94V-0
 Insulator color: White
 Contacts: Copper Alloy
 Barrel: Brass, Nickel plated
 Plating: Tin over Copper underplate.
 Electrical:
 Operation voltage: 12V DC max.
 Current rating: 2 Amp max
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: -20°C to +70°C
 Environmental:
 Operating temperature: -20°C to +70°C
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .XX ± .010 ØXX ± .015
 .XX ± .020 ØXXX ± .010
 .XXX ± .015 ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	SCALE	SHEET	REV.
RCA JACK, RIGHT ANGLE, PCB MOUNT, WHITE	X	RCA-20-3A-W	NTS	1 OF 1	A