

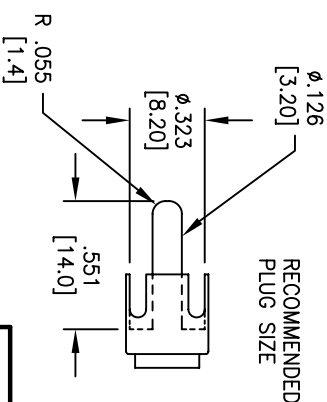
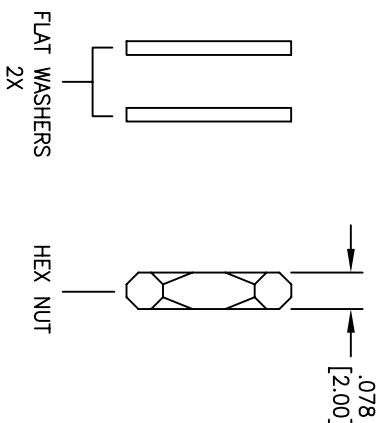


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/7/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

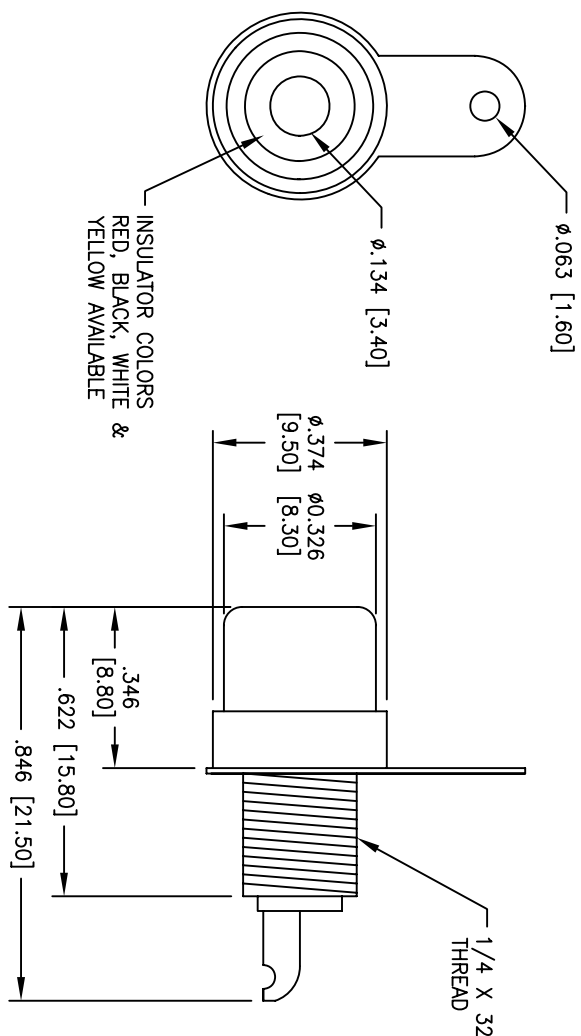

PART NO.	COLOR
RCA-21-1-R	RED
RCA-21-1-B	BLACK
RCA-21-1-W	WHITE
RCA-21-1-Y	YELLOW

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, Glass reinforced, rated UL 94V-0  
 Insulator color: See Chart  
 Bushing: Brass, Nickel plated  
 Contacts: Brass, Nickel plated  
 Terminals: Brass, Nickel plated

**Electrical:**  
 Operating voltage: 12 VDC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -25°C to +85°C

**Environmental:**  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, BULLHEAD MOUNT  
 SOLDER

SIZE	PART NO.	REV.
X	RCA-21-1-X	-

SCALE:	NTS	SHEET	1 OF 1