



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/15	
A		UPDATED DRAWING	5/20/16	HR/AC

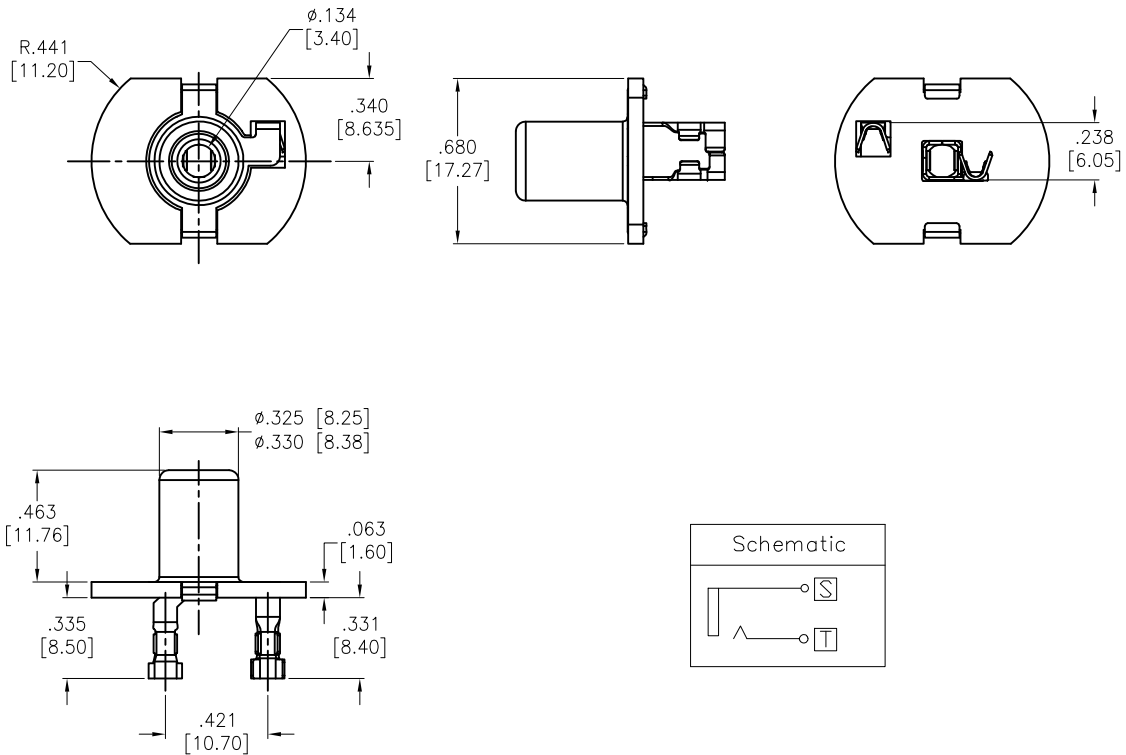

SPECIFICATIONS:
 Material:
 Insulator: Hi-Temp Nylon 6T, UL 94V-0
 Insulator Color: white
 (One piece design mounting plate / bushing)
 Bushing: Brass, Nickel Plated
 Contacts: Phosphor Bronze
 Contact plating: Tin over Copper underplate
 Electrical:
 Voltage Rating: 540 VDC max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min @ 1,000 VDC
 Dielectric withstanding voltage: 700 VAC for 1 minute
 Mechanical:
 Life: 1,000 Cycles
 Insertion / Withdrawal: 3-30 N
 Recommended wire size: 22 - 24 Awg
 Environmental:
 Temperature rating:
 Operating temperature: -40°C to +175°C
 Recommended soldering temp: 260°C for 5 sec.
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10	Ø.X ± .10	TITLE: RCA JACK, SINGLE PORT, VERTICAL, PANEL TYPE, CRIMP CONNECTIONS	
.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010		
APPROVALS		DATE	
DRAWN	SS	11/30/15	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	RCA-22-1-W-C5	A	
REF: S00087T	SCALE: NTS	SHEET 1 OF 1	