



Rev	AWO #	Description	Date	Appr
-		RELEASED	04/16/12	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

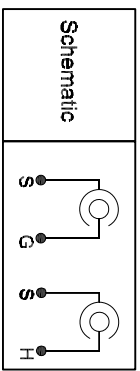

**SPECIFICATIONS:**  
 Material:  
 Insulator: PBT, UL 94V-0  
 Insulator color: Black  
 Contact: Phosphor Bronze  
 Bushing: Brass, Tin plated  
 Washer: PBT  
 Plating:  
 Tin over Copper underplate overall  
 Electrical:  
 Rated Voltage: 16 VDC max.  
 Rated Current: 0.3 Amp.  
 Contact resistance: 50 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -20°C to +60°C  
 Environmental:  
 Lead free, RoHS compliant.

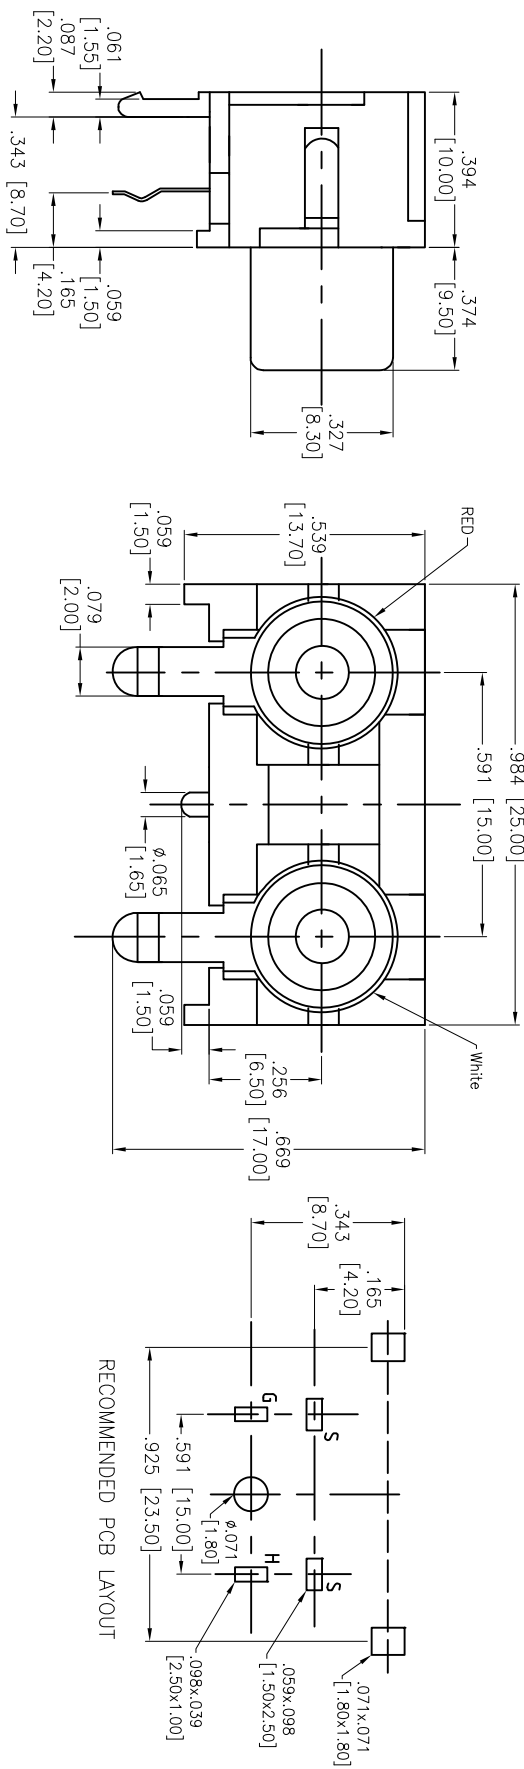

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710  
**RCA JACK, 2 PORTS, RED/WHITE**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN TW	04/16/12
CHECKED AY	04/16/12
APPROVED	

SIZE	PART NO.	SCALE	SHEET 1 OF 1
X	RCA-28A-1-RW	NTS	1

6 5 4 3 2 1