



Rev	AWO #	Description	Date	Appr
-		RELEASED	7/13/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

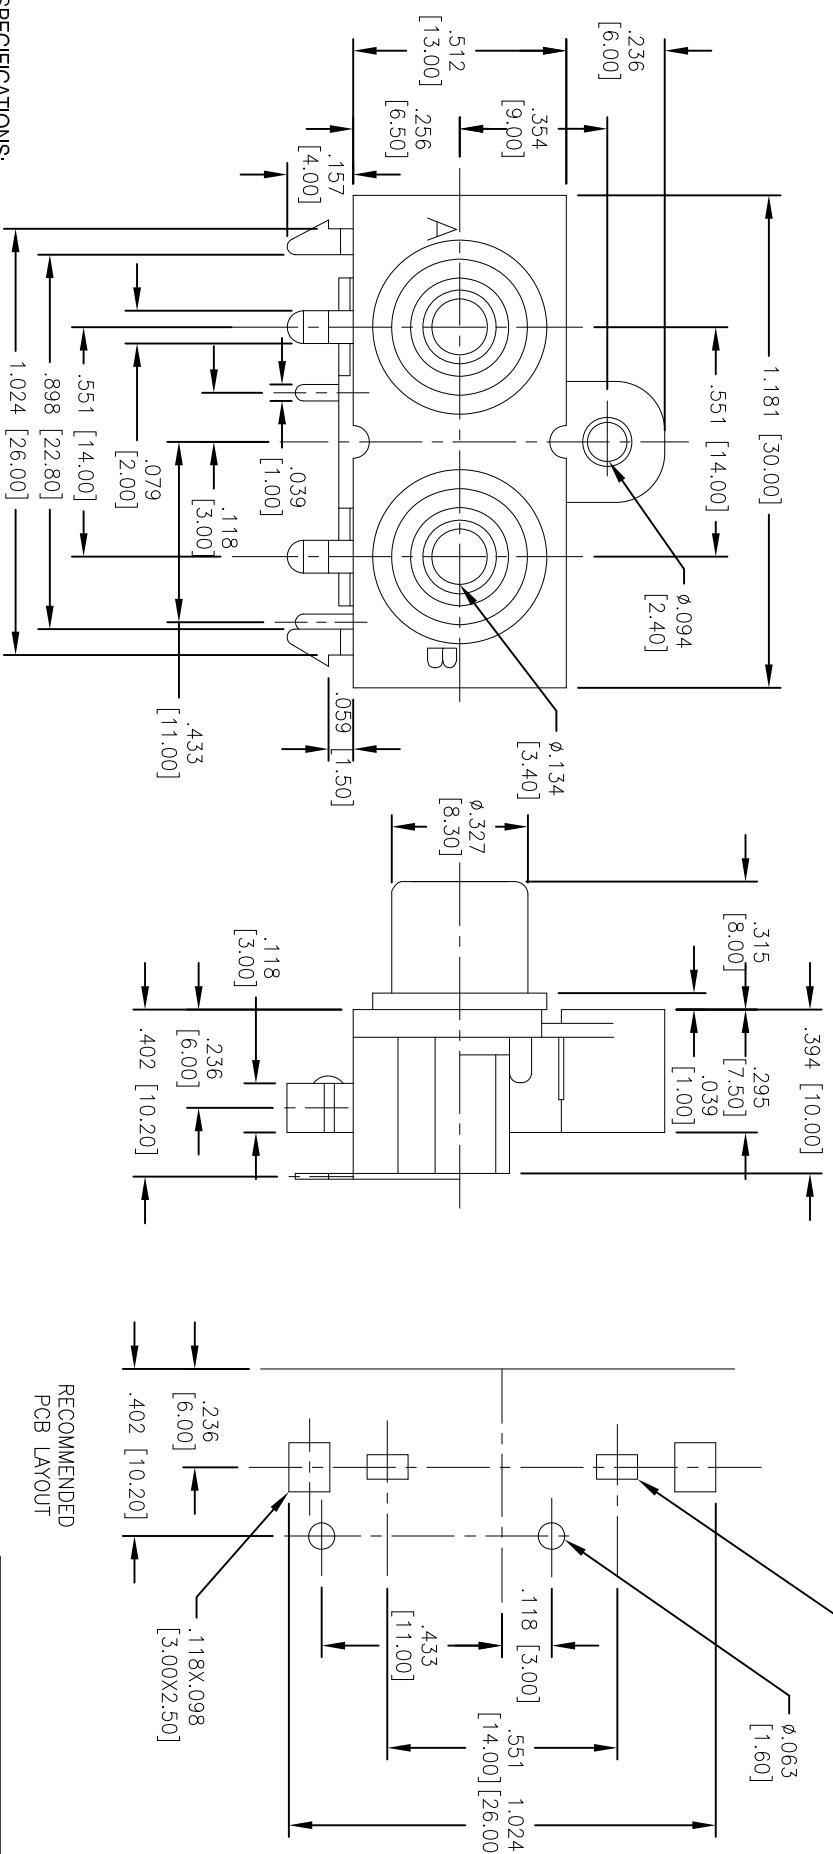

RECOMMENDED  
PCB LAYOUT

ADAM P/N	A and B (X/X)
RCA-32-1-W/R	W = WHITE
RCA-32-1-R/W	R = RED



**SPECIFICATIONS:**

- Material: Housing: ABS, color Black; Insulator colors: Black; Washer: ABS
- Panel: ABS, color Black
- Terminal: Brass, Tin plated
- Outer contacts: Brass, Tin plated
- Electrical: Operation voltage: 50V DC; Current rating: 0.3 Amps; Contact resistance: 30 mohms max.; Dielectric withstanding voltage: 500 VAC for 1 minute; Temperature rating: Operating temperature: -20°C to +70°C; Lead free, RoHS compliant.

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, VERTICAL, PCB  
 RED/WHITE OR WHITE/RED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	7/13/11
CHECKED SC	7/13/11
APPROVED	

REF: S00002C	SCALE: NTS	SHEET 1 OF 1
SIZE PART NO.	RCA-32-1-X	REV.

