Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/13	

APPROVED: _____

DATE: _____ TITLE: _____

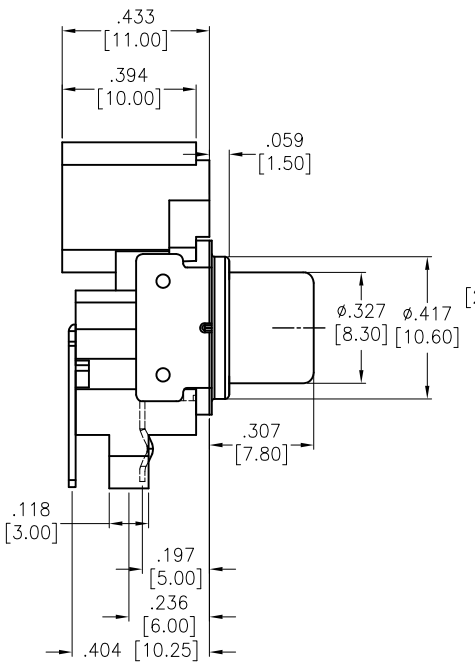

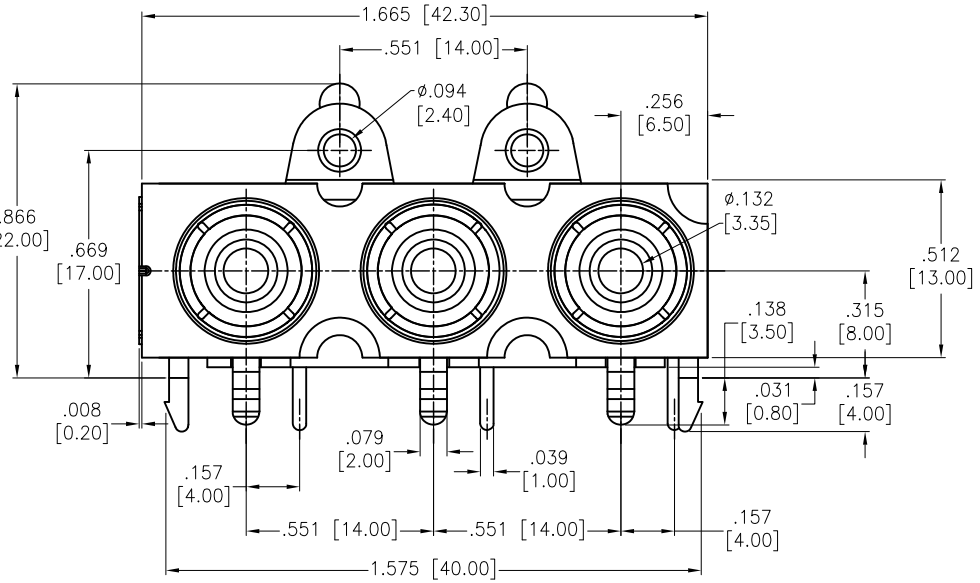

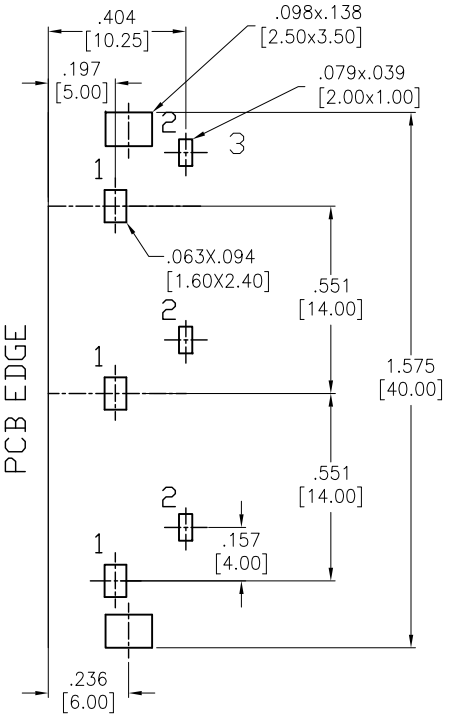

RECOMMENDED PCB LAYOUT
(BOTTOM VIEW)

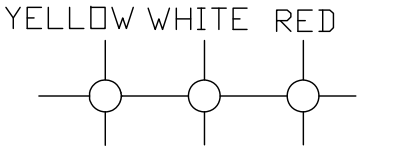

INSERT RING COLORS

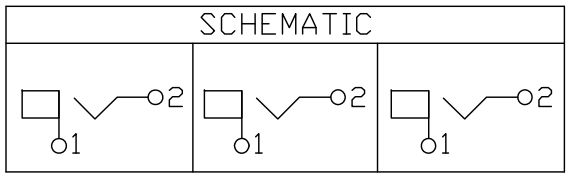

SPECIFICATIONS:
Material:
Insulator: ABS, rated UL 94V-0
Insulator colors: White
Cover: ABS, Black
Insert Ring: PBT, Glass reinforced, Color: Red/White/Yellow
Terminal: Brass, Tin plated
Barrel: Brass, Nickel plated
Shell Cover: Brass, Nickel plated
Electrical:
Current rating: 2 Amps @ 12VDC
1 Amps @ 100VAC
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/17/13
CHECKED	EH	1/17/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
RCA JACK, VERTICAL, PCB, SHELL
YELLOW/WHITE/RED

SIZE	PART NO.	REV.
X	RCA-32AS-1-Y/W/R	-

REF: S00095T | SCALE: NTS | SHEET 1 OF 1