Rev	AWO #	Description	Date	Appr
-		RELEASED	4/30/12	

APPROVED: _____

DATE: _____ TITLE: _____

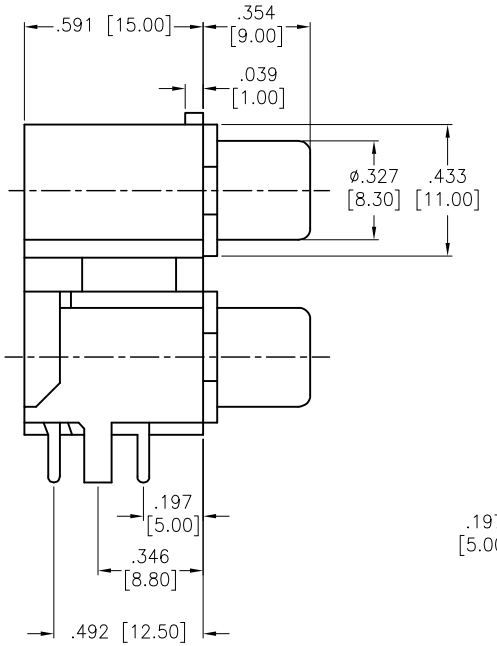

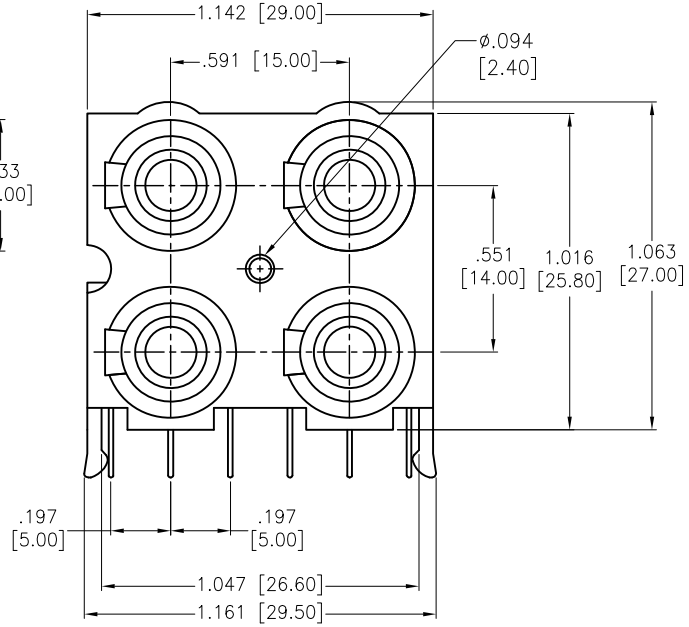

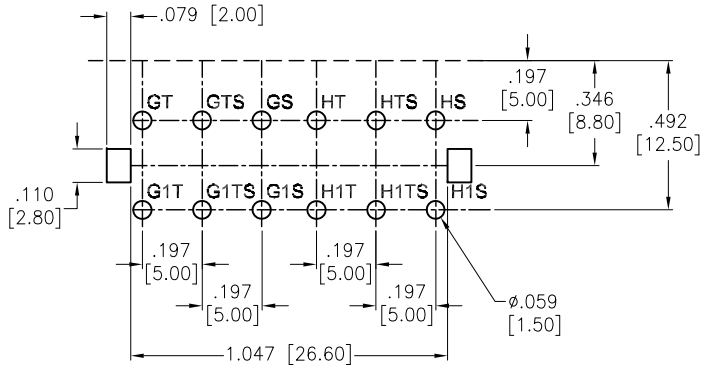

RECOMMENDED PCB LAYOUT

SCHEMATIC



SPECIFICATIONS:
Material:
Insulator: PBT, UL 94V-0
Insulator color: Black
Washer: PBT
Contact: Brass
Shield: Brass
Cover: ABS
Plating:
Tin over Copper underplate overall
Electrical:
Rated Voltage: 16 VDC max.
Rated Current: 0.3 Amp.
Contact resistance: 50 mohms max. initial
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -20°C to +60°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/30/12
CHECKED	EH	4/30/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, 4 PORTS, YELLOW

SIZE	PART NO.	REV.
X	RCA-36-2-Y/Y/Y/Y	-

REF: S00211T | SCALE: NTS | SHEET 1 OF 1