

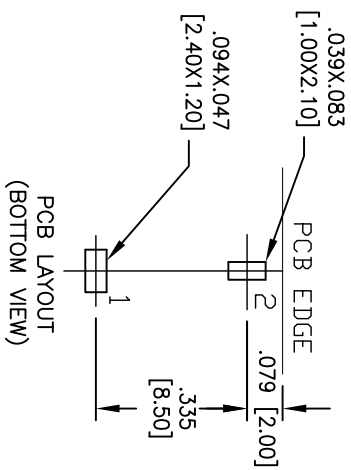
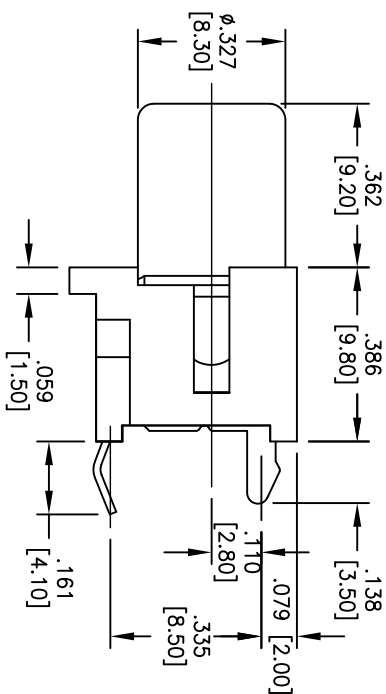


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/26/15	

APPROVED: _____
 DATE: _____ TITLE: _____

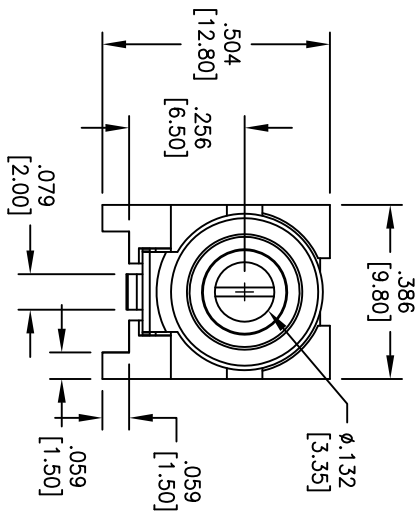

PART NO.	COLOR
RCA-4-1-R-G	RED
RCA-4-1-B-G	BLACK
RCA-4-1-W-G	WHITE
RCA-4-1-Y-G	YELLOW

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator colors: Red, Black, Yellow, White

Barrel: Brass, Gold plated

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 12 VDC max.

Current rating: 2 Amp max.

Contact resistance: 30 mohms max. Initial

Insulation resistance: 100 Mohms min @ 500 VDC.

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010

APPROVALS

APPROVALS	DATE
DRAWN AY	8/26/15
CHECKED CT	8/26/15
APPROVED	

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, VERTICAL, PCB, BARREL GOLD PLATED

SIZE	PART NO.	REV.
X	RCA-4-1-X-G	

REF: S00095T SCALE: NTS SHEET 1 OF 1

