

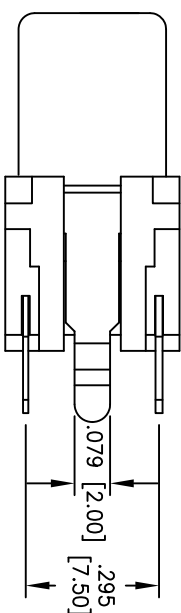


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/10/13	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

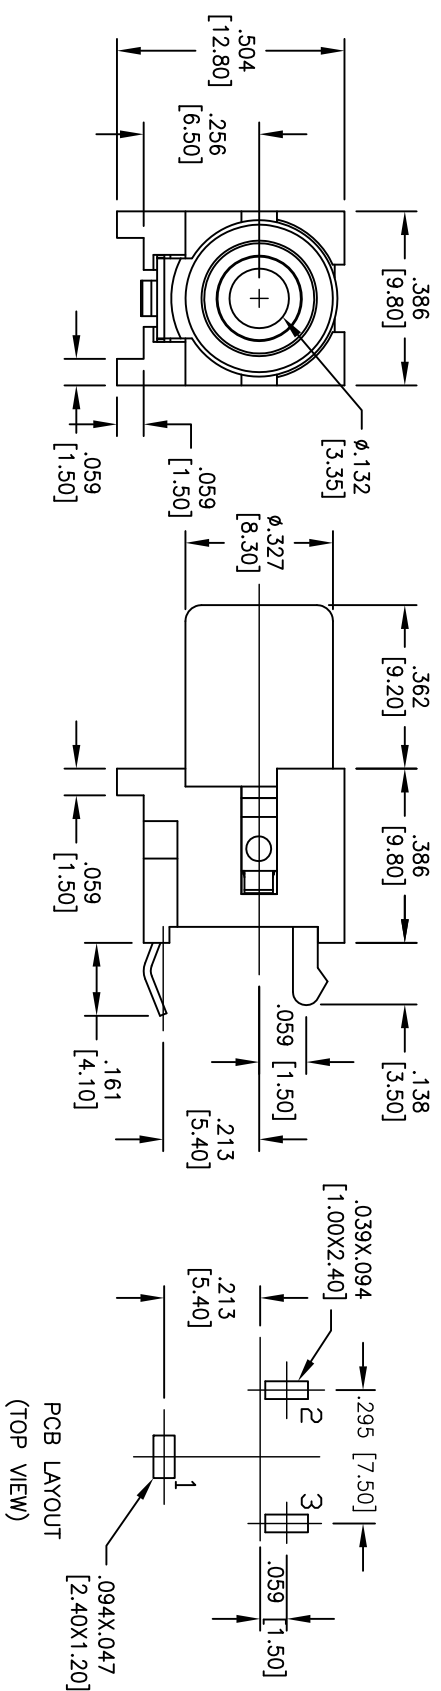

PART NO.	COLOR
RCA-4-2-R	RED
RCA-4-2-B	BLACK
RCA-4-2-W	WHITE
RCA-4-2-Y	YELLOW
RCA-4-2-BL	BLUE
RCA-4-2-G	GREEN
RCA-4-2-O	ORANGE



**SPECIFICATIONS:**

- Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
- Insulator colors: Red, Black, Yellow, White, Green, Blue, Orange
- Barrel: Brass, Nickel plated
- Contacts: Brass
- Spring Terminal: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 12 VDC max.
- Current rating: 2 Amp max.
- Contact resistance: 30 mohms max. initial
- Insulation resistance: 100 Mohms min @ 500 VDC.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Environmental: Lead free, RoHS compliant.

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, VERTICAL, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	AY	7/10/13	
CHECKED	AH	7/10/13	
APPROVED			
TITLE		SIZE	PART NO.
RCA JACK, VERTICAL, PCB		X	RCA-4-2-X
REF: S00098T		SCALE: NTS	SHEET 1 OF 1