



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/1/12	

APPROVED: _____
 DATE: _____ TITLE: _____

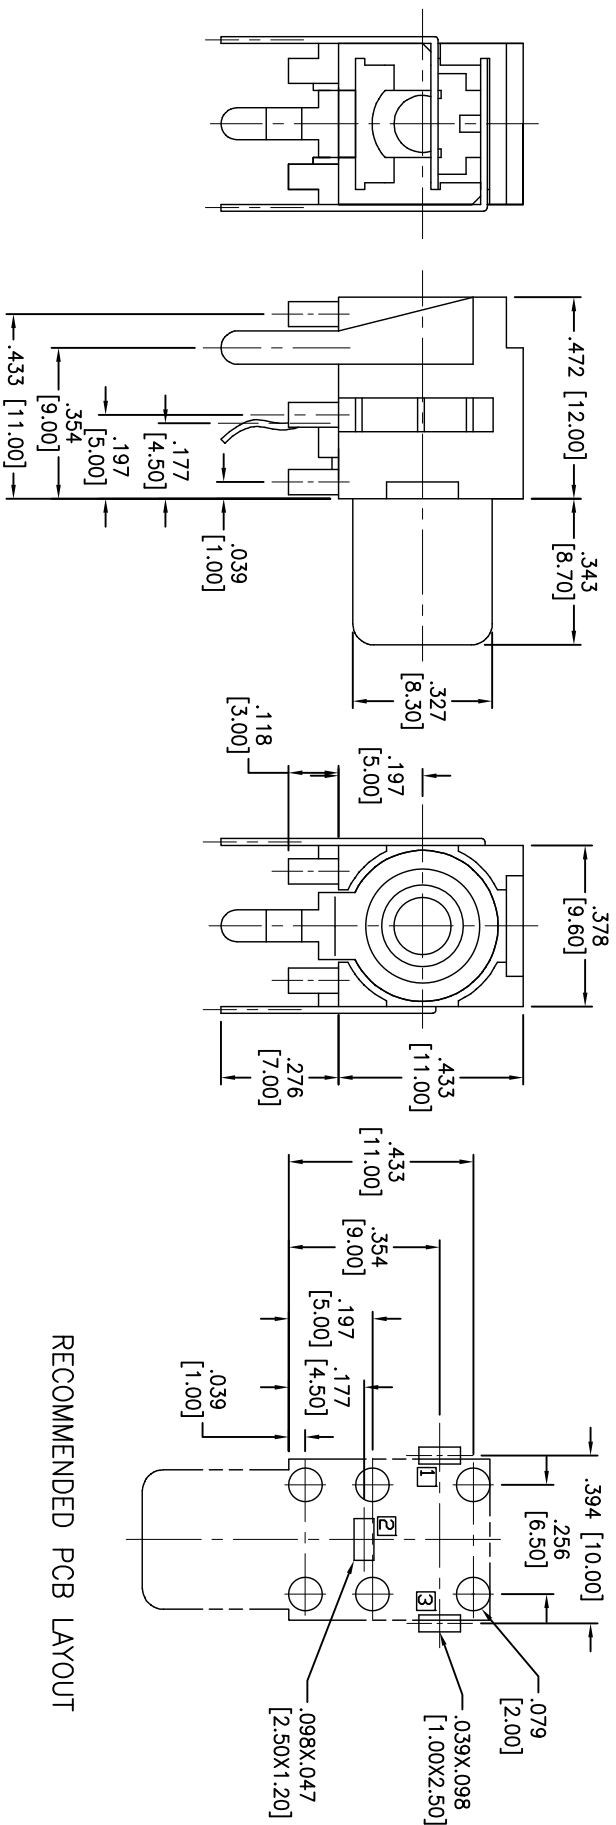

RECOMMENDED PCB LAYOUT

COLOR	P/N:
GREY	RCA-41-2-GY-G
ORANGE	RCA-41-2-O-G
RED	RCA-41-2-R-G
WHITE	RCA-41-2-W-G
BLACK	RCA-41-2-B-G
YELLOW	RCA-41-2-Y-G



SPECIFICATIONS:
 Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator colors available: See Color Table
 Bushing: Copper Alloy, Gold plated
 Contacts: Copper Alloy, Silver plated
 Electrical:
 Operation voltage: 30V DC max.
 Current rating: 01 Amp max
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature rating:
 Operating temperature: -20°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, RIGHT ANGLE, 1 PORT
 PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
X	± .10	Ø X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	AY	10/1/12	
CHECKED	SC	10/1/12	
APPROVED			
SIZE	PART NO.	SCALE:	SHEET 1 OF 1
X	RCA-41-2-X-G	NTS	
REF: S00002C			