

6

5

4




3

2

1

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/13	
A		ADDED DIM.	12/11/13	AV/AH

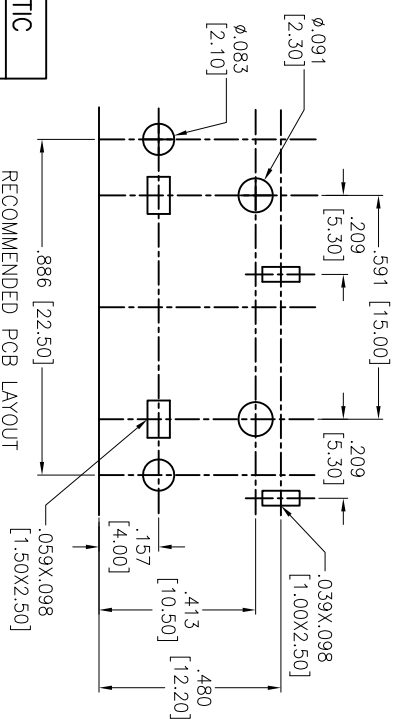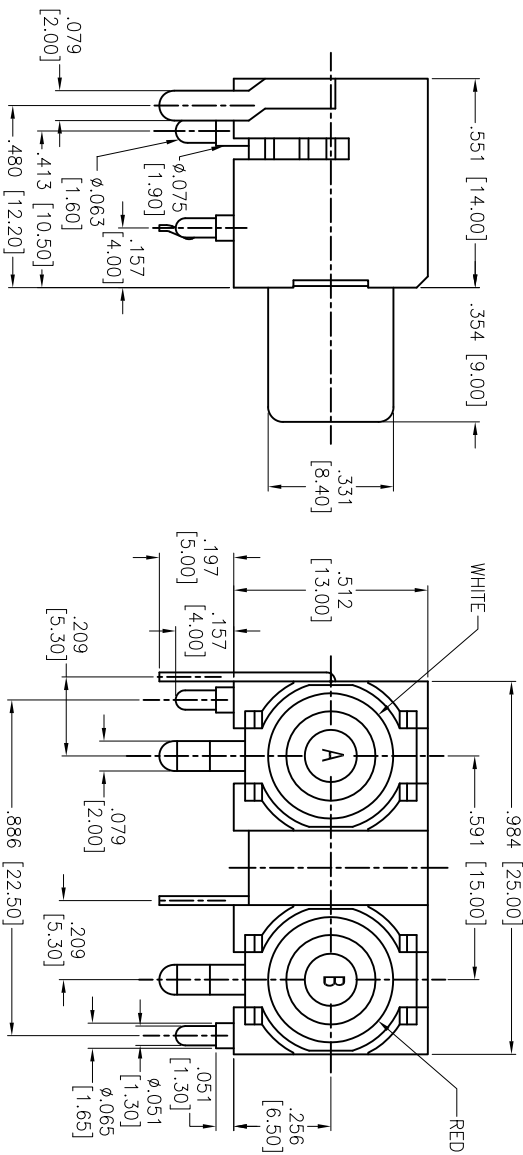

**SPECIFICATIONS:**  
**Material:**  
 Insulator: PBT, rated UL 94V-0  
 Insulator colors available: , White & Red, Black(Body)  
 Bushing: Copper Alloy  
 Contacts: Copper Alloy  
**Plating:**  
 Tin over Copper underplate.  
**Electrical:**  
 Operation voltage: 50V DC max.  
 Current rating: 0.2 Amp max  
 Contact resistance: 0.03Ω Max.  
 Insulation resistance: 100 MΩ min @ 500VDC  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
**Temperature rating:**  
 Operating temperature: -40°C to +70°C  
**Environmental:**  
 Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, RIGHT ANGLE, WHITE/RED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TITLE	
TOLERANCES: EXCEPT AS NOTED		RCA JACK, RIGHT ANGLE, WHITE/RED	
INCHES		SIZE	
.X ± .10		PART NO.	
.XX ± .020		RCA-6A-1-W/R	
.XXX ± .015		SCALE: NTS	
.XXX ± .010		SHEET 1 OF 1	
APPROVALS		REV. A	
DRAWN	HR	11/22/13	
CHECKED	AH	11/22/13	
APPROVED			

6

5

4

3

2

1