
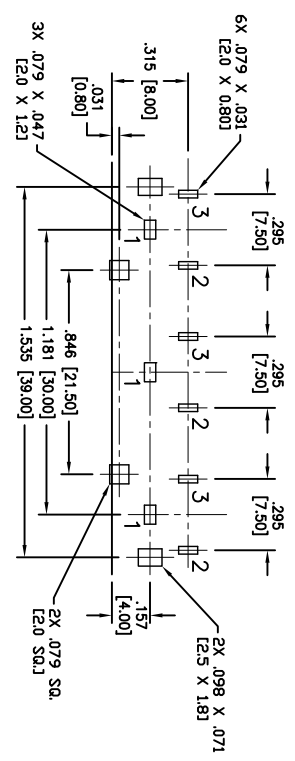
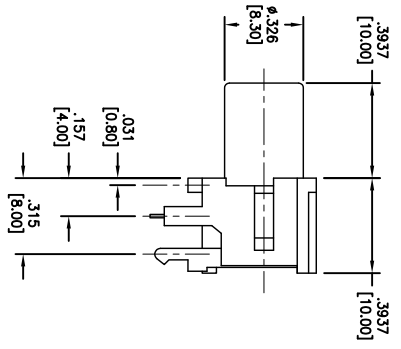


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

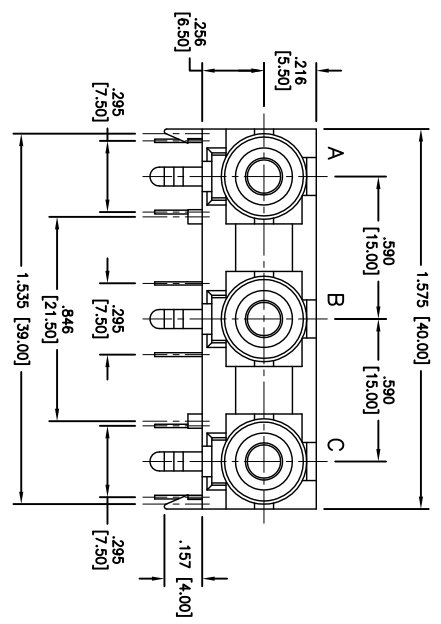


COLORS:  
 A = YELLOW, B = WHITE, C = RED

**SPECIFICATIONS:**  
 Material: PBT, Glass reinforced, rated UL 94V-0  
 Insulator colors available: Red, Black, Yellow, White  
 Bushing: Brass, Nickel plated  
 Contacts: Brass  
 Plating: Tin or Silver over Copper underplate

**Electrical:**  
 Operating voltage: 12 VDC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Environmental:**  
 Operating temperature: -25°C to +85°C  
 Temperature Rating:  
 Recommended soldering temp: 235°C for 5 sec.

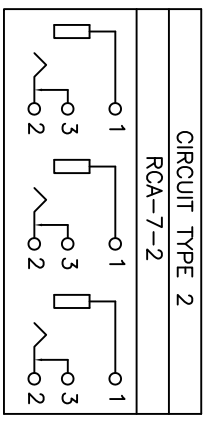

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 3 PORTS, GANGED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		DATE	
INCHES	± .10	HOLES	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	6/22/07	
CHECKED			
APPROVED			
TITLE		REV.	
RCA JACK, 3 PORTS, GANGED		-	
SIZE PART NO.		REV.	
X RCA-7-2-Y / W / R		-	
REF: SCALE: NTS		SHEET 1 OF 1	