



Rev	AWO #	Description	Date	Appr
-	7574	RELEASED	3/2/07	

APPROVED: _____
 DATE: _____ TITLE: _____

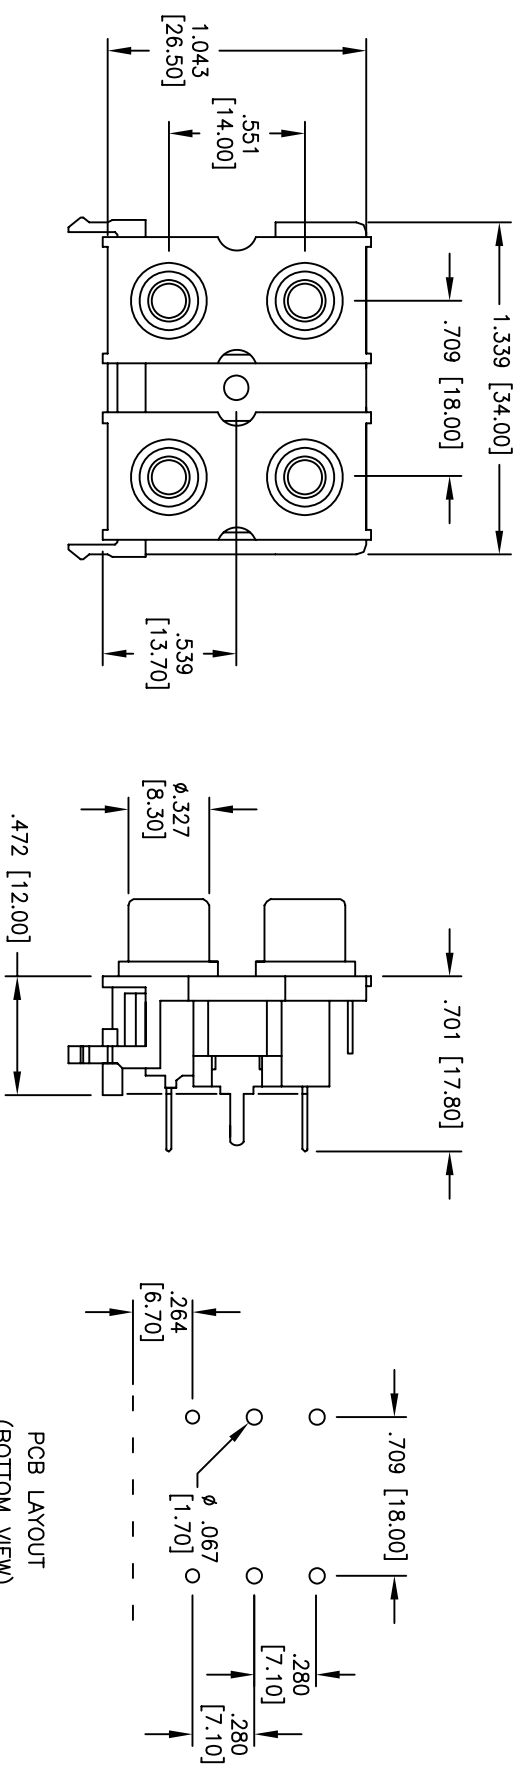

SPECIFICATIONS:
 Material: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Inserts: PBT, Color Black
 Bushing: Brass, Nickel plated
 Contacts: Brass
 Barrels: Steel, Gold plated
 Plating: Tin or Silver over Copper underplate

Electrical:
 Operating voltage: 12 VDC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C

Environmental:
 Lead free: RoHS Compliant
 Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, 4 PORTS, 2 X 2, TOP/BOTTOM
 GOLD PLATED BARRELS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.XX	± .10	ØXX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS	DATE				
DRAWN	BW	3/2/07			
CHECKED					
APPROVED					
SIZE	PART NO.	REV.			
X	RCA-9-4-XX-G	-			
REF.	SCALE: NTS	SHEET 1 OF 1			