



Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/15	


APPROVED: _____
 DATE: _____ TITLE: _____

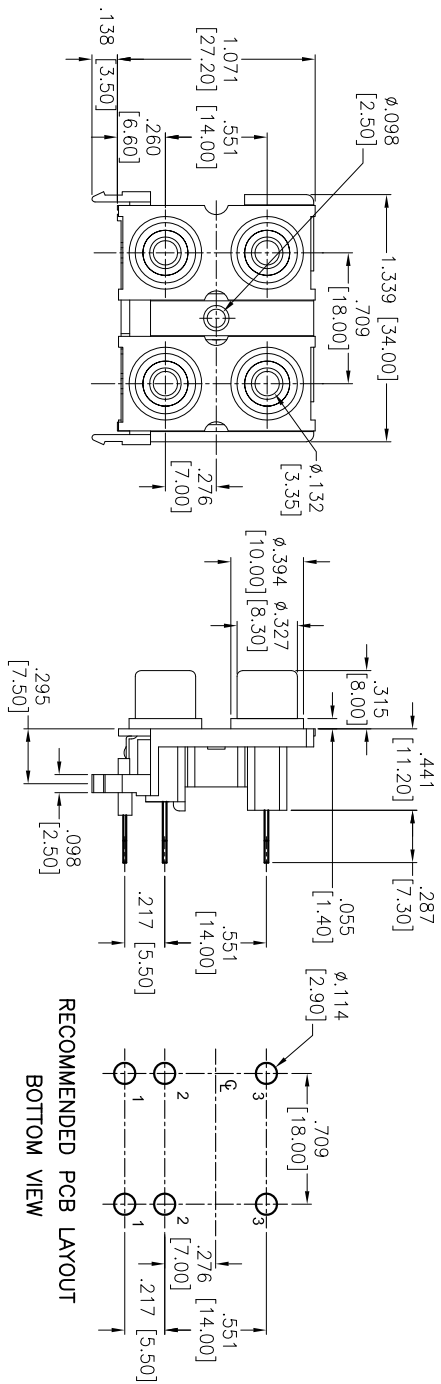

RECOMMENDED PCB LAYOUT
 BOTTOM VIEW



INSERT RING COLORS



SCHEMATIC

SPECIFICATIONS:

- Material: Insulator: ABS, Glass reinforced, rated UL 94V-0
- Insulator colors: White
- Cover: ABS, Glass reinforced, rated UL 94V-0, colors: Black
- Insert Ring: PBT, Glass reinforced, rated UL 94V-0
- Insert Ring colors: White & Red
- Barrel: Brass, Nickel plated
- Contacts: Brass
- Plating: Tin over Copper underplate overall

Electrical: Voltage & Current rating: 12 VDC 2A max, 100 VAC 1A max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min @ 500 V DC.

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental: Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN AY	4/13/15
CHECKED AC	4/13/15
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 4 PORTS, 2 X 2

SIZE	PART NO.	REV.
X	RCA-9A-4-W/R/W/R	-
REF: S00095T	SCALE: NTS	SHEET 1 OF 1