



Rev	Description	Date	Appr
-	Preliminary	07/15/99	

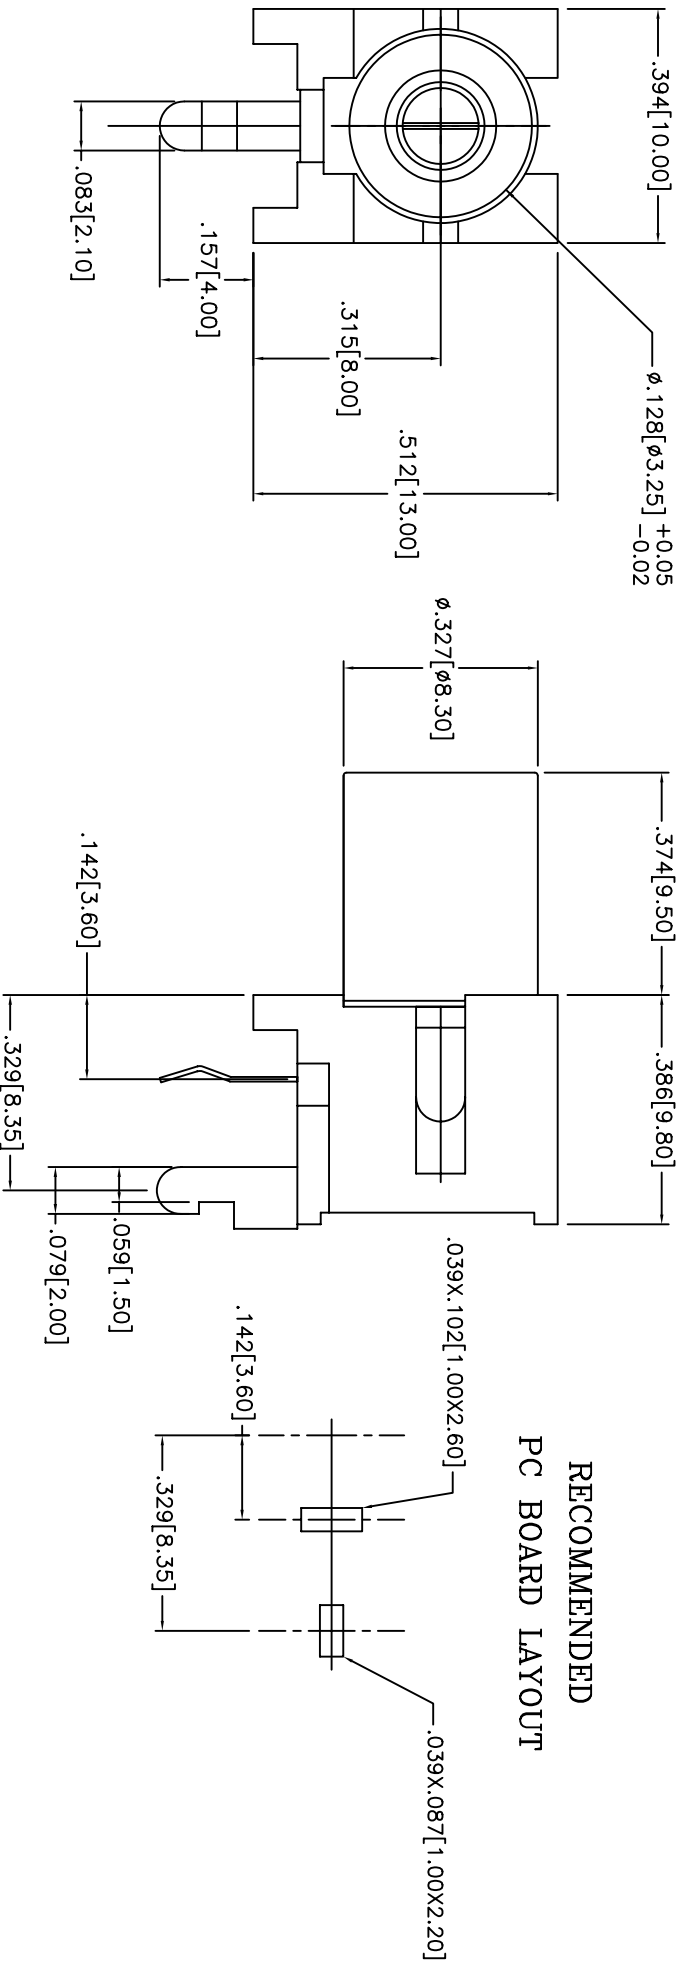

**SPECIFICATIONS:**

**MATERIAL:**

Insulator: Polybutylene Terephthalate (PBT), glass reinforced thermoplastic, rated UL 94V-0

Contacts: Phosphor Bronze

**PLATING:**

50 µin nickel underplate to QQ-N-290, Class 2, Grade C with 50 µin silver to QQ-S-365, Class 2, Grade C

**ELECTRICAL:**

Operation voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 50 mohm max

Insulation resistance: 100 Mohm min @ 500 VDC

Dielectric withstanding voltage: 500 VAC min rms for 1 minute

ENVIRONMENTAL:  
Operating temperature: -65°C to +125°C

<b>ADAM TECH</b>		PART NUMBER: RCA-H11B-S	
Dimension in IN [MM]		DESCRIPTION: TYPE 1 RCA JACK	
Tolerance (Unless Otherwise Specified) XX ± .01 XXX ± .005		DRAWN: L.M.E.C.	
Date: 007/15/99		APPR: SCALE: NTS	
SHEET 1 OF 1 SHEETS		LOG 7693	
REF. -		REV. -	