
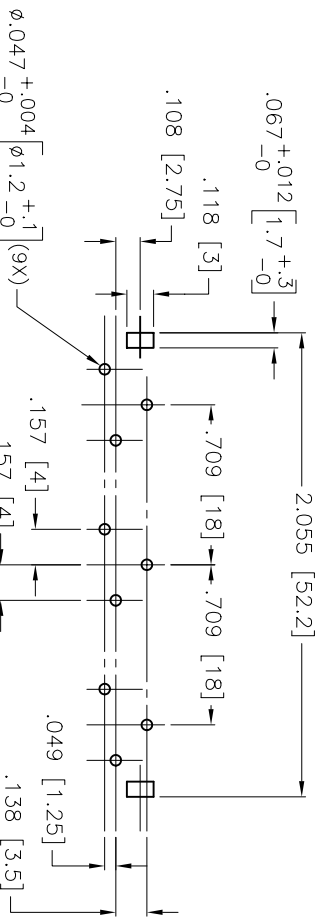
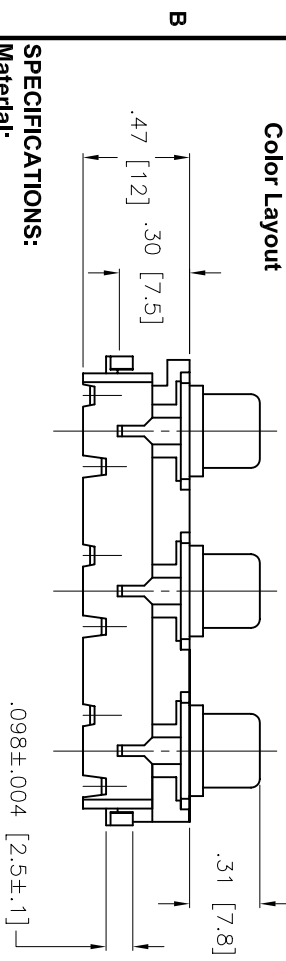
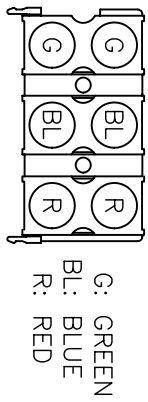
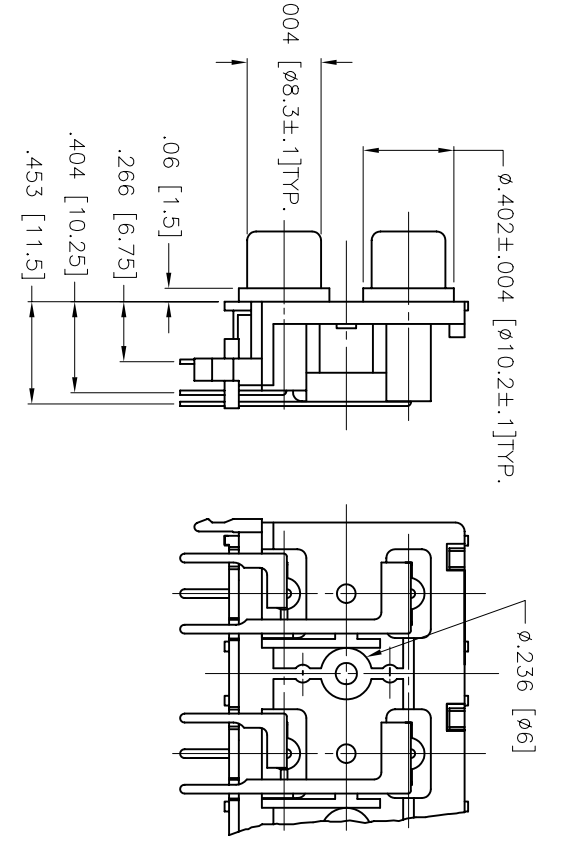


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 7/15/04 | |

APPROVED: _____
 DATE: _____ TITLE: _____

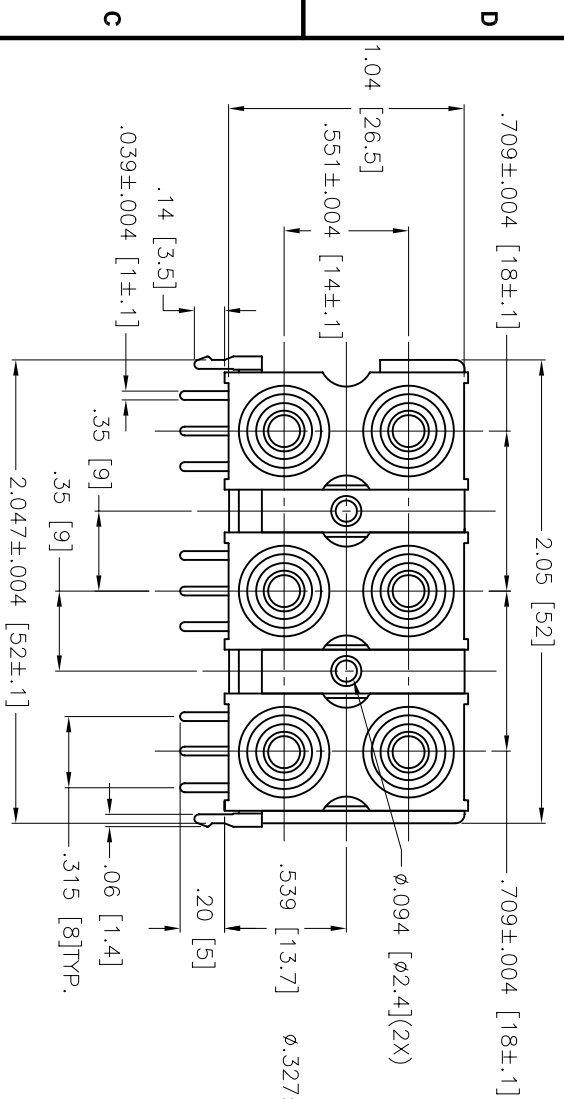

Recommended PCB Layout
 Tolerance: ±.004 [±.10]

SPECIFICATIONS:

Material:
 Insulator: ABS, rated UL94HB, Color: Black
 Contacts: Copper Alloy

Plating:
 Center Contacts: Tin/Lead Plated
 Outer Contacts: Nickel Plated

Electrical:

Voltage rating: 34 VDC or AC
 Current rating: 2 Amps DC or AC
 Contact resistance: 30 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:

Operating temperature: -25°C to +70°C

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

| INCHES | HOLES |
|------------|------------|
| .X ±.10 | ØX ±.10 |
| .XX ±.020 | ØXX ±.015 |
| .XXX ±.015 | ØXXX ±.010 |

APPROVALS: _____ DATE: _____

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 6 PORT STACKED, RIGHT ANGLE
 PCB, GREEN / BLUE / RED

| | | | | | | | |
|----------|----|---------|------|----------|--------------|-------|--------|
| DRAWN | SS | 7/15/04 | SIZE | PART NO. | RCA-H96-GBLR | REV. | - |
| CHECKED | | | X | | | | |
| APPROVED | | | REF: | SCALE: | NTS | SHEET | 1 OF 1 |