


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	Description	Date	Appr
-	Released	3/10/00	

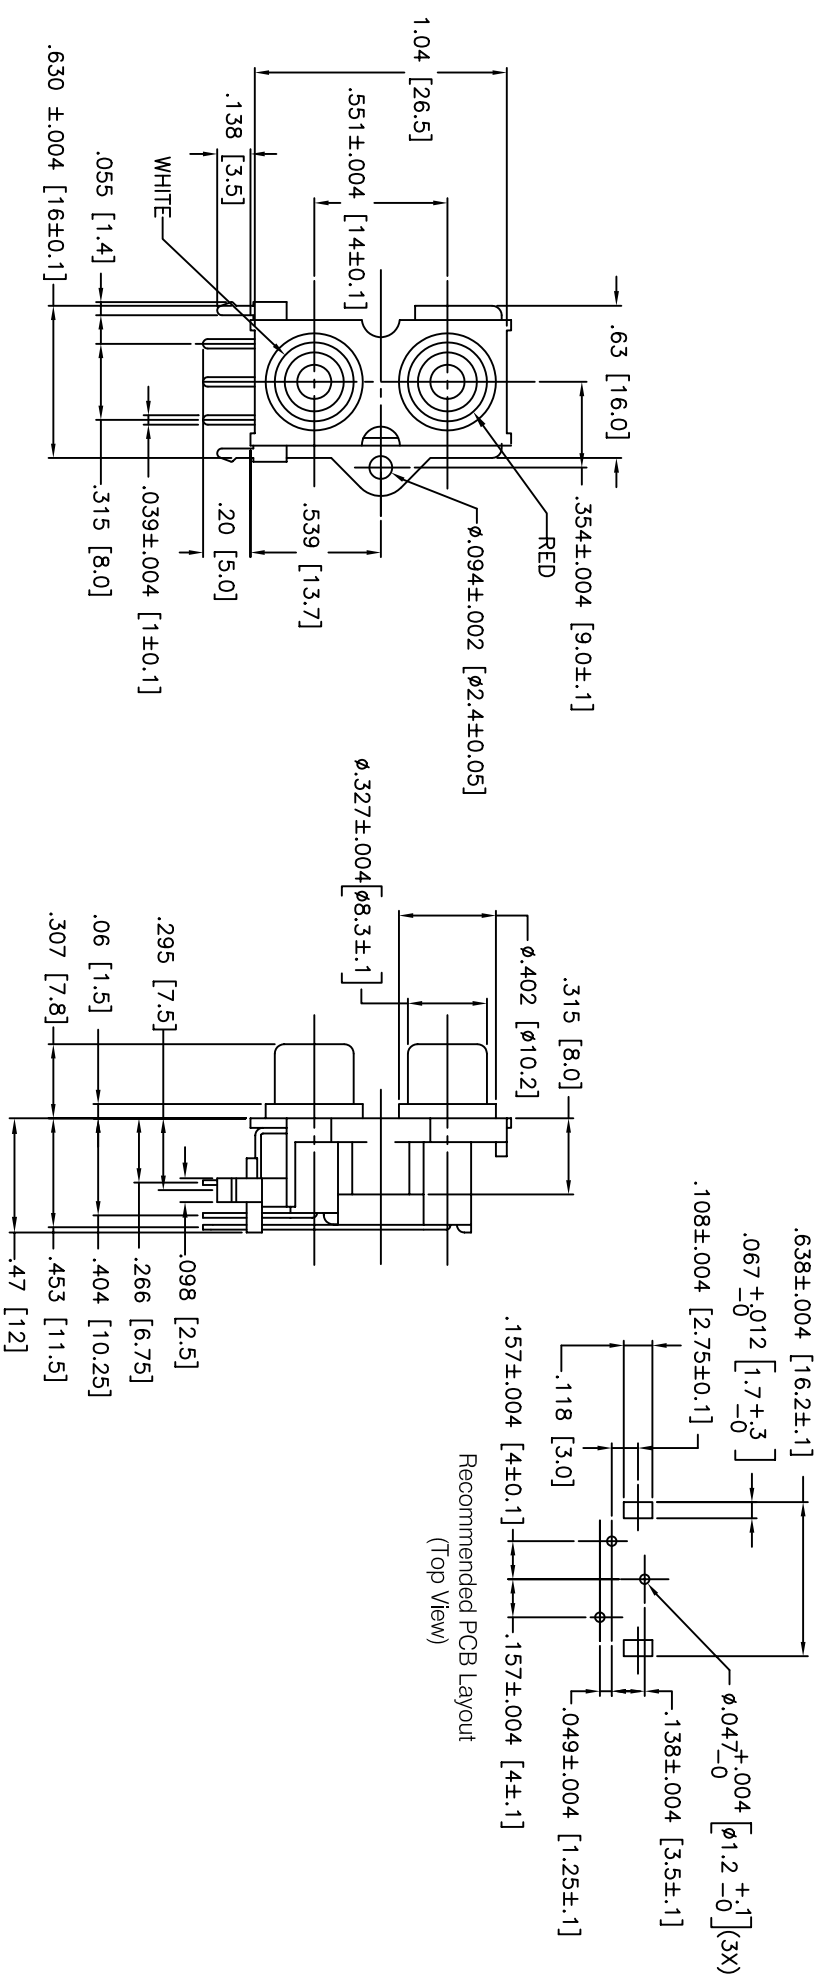

**SPECIFICATIONS:**

**Material:**  
 Insulator: ABS, UL94HB  
 Contacts: Copper Alloy

**Plating:**  
 120 u" tin-lead over 80 u" Copper underplate.

**Electrical:**

**Voltage, Current Rating:** 34V, 2A AC / DC  
**Contact resistance:** 30 milli-ohms max. @500 VDC; 100ma (max).  
**Insulation resistance:** 100 Megohms min.

**Dielectric withstanding voltage:** 500V rms @ 60 Hz for 1 minute.

**Mechanical:**

**Insertion Force:** Less than 3.0 Kg (29.4N).  
**Withdrawal Force:** 0.8 to 3.0 Kg (0.98N to 29.4N).  
**Resistance to Soldering Heat:** 260±5°C; 5±0.5 Seconds

**Environmental:**

**Operating temperature:** -25°C to +70°C.

<b>ADAM TECH</b>		<b>DESCRIPTION :</b> 2 Port, Vertical Mount, RCA Jack	
<b>Dimension in IN [MM]</b>		<b>PART NUMBER :</b> RCA-V72B-R/W-T	
<b>Tolerance</b> (Unless Otherwise Specified) .XX ± .010 .XXX ± .005		<b>LOG REF. REV.</b>	
<b>DATE:</b> 3/10/00	<b>DRAWN:</b> WGGM	<b>SHEET</b> 1	<b>LOG REF. REV.</b>
<b>SCALE:</b> NTS	<b>APPR:</b>	<b>OF</b> 1 SHEETS	<b>9595</b>