


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	Description	Date	Appr
-	Released	3/10/00	

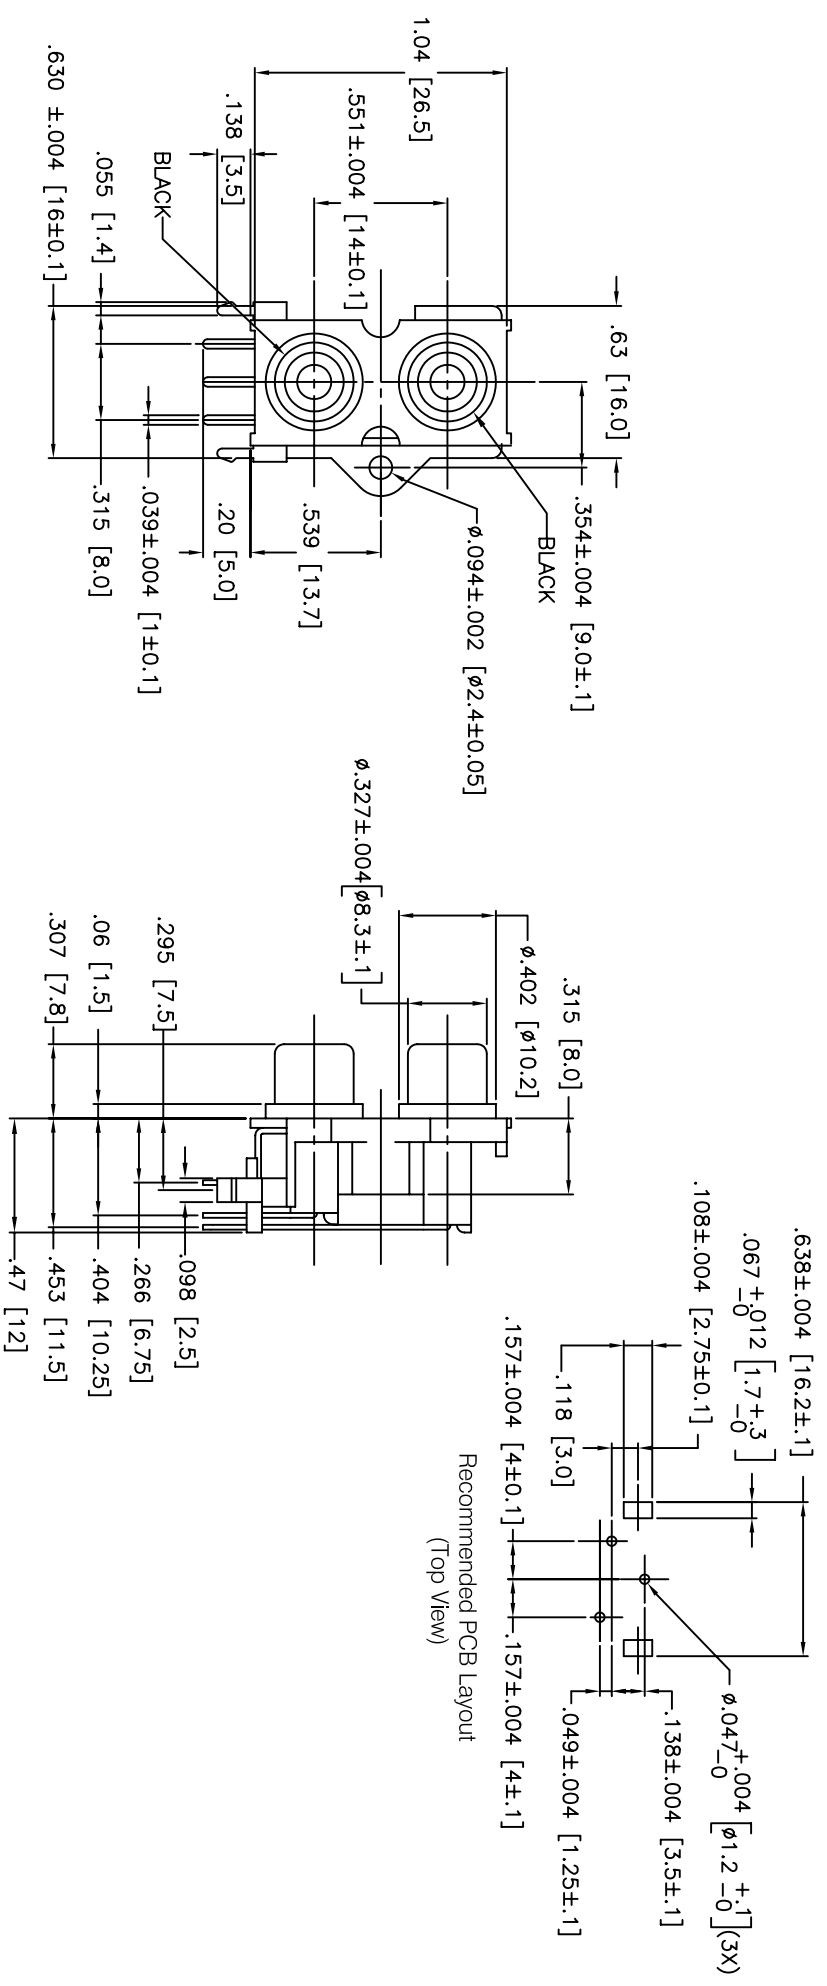

SPECIFICATIONS:

Material:
 Insulator: ABS, UL94HB
 Contacts: Copper Alloy

Plating:
 120 u" tin-lead over 80 u" Copper underplate.

Electrical:
 Voltage, Current Rating: 34V, 2A AC / DC
 Contact resistance: 30 milli-ohms max. @500 VDC; 100ma (max).
 Insulation resistance: 100 Megohms min.
 Dielectric withstanding voltage: 500V rms @ 60 Hz for 1 minute.

Mechanical:
 Insertion Force: Less than 3.0 Kg (29.4N).
 Withdrawal Force: 0.8 to 3.0 Kg (0.98N to 29.4N).
 Resistance to Soldering Heat: 260±5°C; 5±0.5 Seconds

Environmental:
 Operating temperature: -25°C to +70°C.

ADAM TECH		DESCRIPTION: 2 Port, Vertical Mount, RCA Jack	
Dimension in IN [MM]		PART NUMBER: RCA-V72B/B-S	
Tolerance (Unless Otherwise Specified) .XX ± .010 .XXX ± .005		DRAWN: WGGM	
Date: 3/10/00		APPR: _____	
SCALE: NTS		SHEET 1 OF 1 SHEETS	
		LOG 9595	
		REF. _____	
		REV. _____	