


APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	Description	Date	Appr
-	Released	3/10/00	

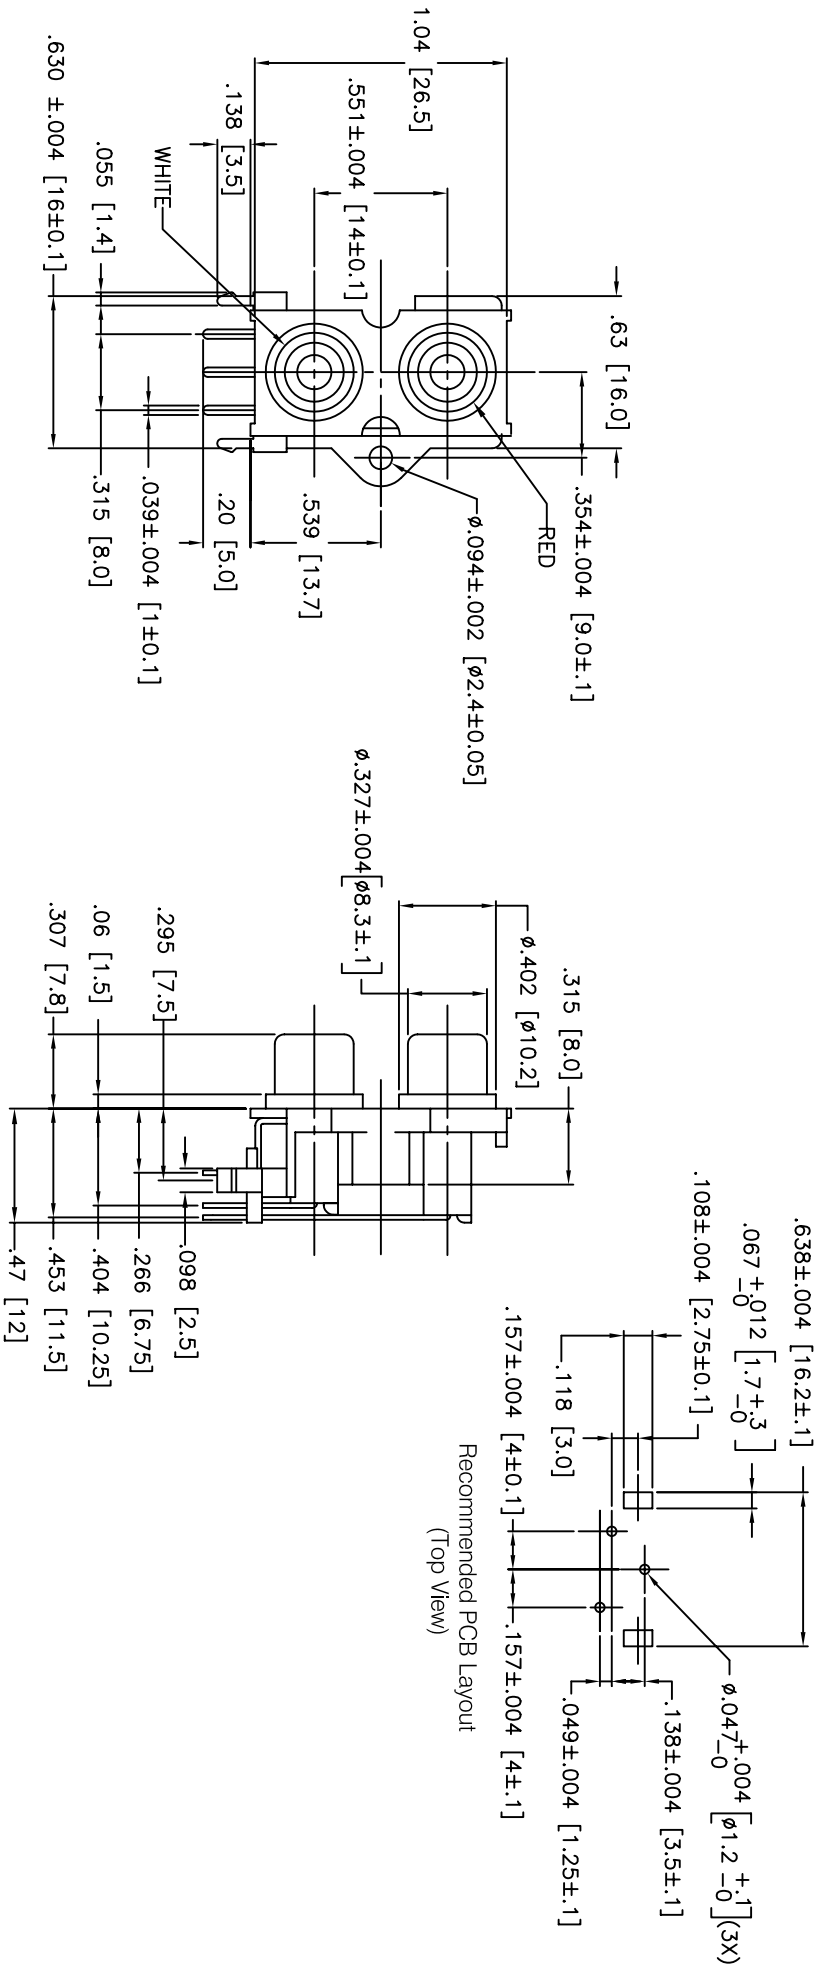

**SPECIFICATIONS:**

**Material:**  
 Insulator: ABS, UL94HB  
 Contacts: Copper Alloy  
 Plating:  
 120 u" tin-lead over 80 u" Copper underplate.

**Electrical:**  
 Voltage, Current Rating: 34V, 2A AC / DC  
 Contact resistance: 30 milli-ohms max. @500 VDC; 100ma (max).  
 Insulation resistance: 100 Megohms min.  
 Dielectric withstanding voltage: 500V rms @ 60 Hz for 1 minute.

**Mechanical:**  
 Insertion Force: Less than 3.0 Kg (29.4N).  
 Withdrawal Force: 0.8 to 3.0 Kg (0.98N to 29.4N).  
 Resistance to Soldering Heat: 260±5°C; 5±0.5 Seconds

**Environmental:**  
 Operating temperature: -25°C to +70°C.

**ADAM TECH**

**DESCRIPTION:**  
 2 Port, Vertical Mount, RCA Jack

**Dimension in IN [MM]**  
**Tolerance**  
 (Unless Otherwise Specified)  
 .XX ± .010  
 XXX ± .005

**DRAWN:** WGGM  
**APPR:**

**PART NUMBER:**  
 RCA-V72B-R/W-T

**Date:** 3/10/00

**SCALE:** NTS

**SHEET** 1  
**OF** 1 SHEETS

**LOG** 9595  
**REF.**  
**REV.** -