

6

5

4



3

2


1

APPROVED: _____
 DATE: _____ TITLE: _____





Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/03	
A		UPDATED	10/6/08	



RECOMMENDED
 PANEL CUTOUT

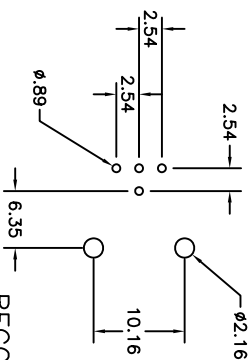

RECOMMENDED
 PC Board Layout
 Right Angle Mount

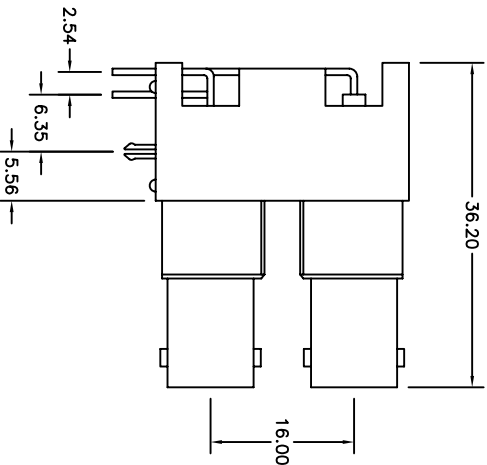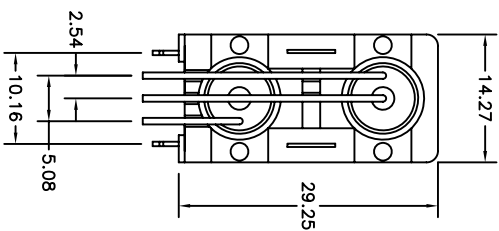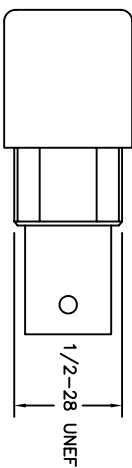

SPECIFICATIONS

Material:

Body: PBT, Color Black

Contact insulation: Polypropylene, color white.

Contacts: Phosphor Bronze, Gold and Tin plated.

Dielectric: Polypropylene

Electrical

Nominal Impedance: 75 Ohms

Frequency Range: 0 – 4 GHz

Maximum Peak Voltage: 500V

Insulation Resistance: 5000 Mohms min @ 500 VDC

Dielectric Withstanding Voltage: 1500 VAC rms.

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES

.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS

DATE

DRAWN

DATE

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
**DUAL PORT BNC, R/A PCB MOUNT,
 75 OHM IMPEDANCE**

SIZE X PART NO. RF1-01D-P-00-75

SCALE: NTS

A

A

B

B

C

C

D

D

6

5

4

3

2

1

A

A

B

B

C

C

D

D

6

5

4

3

2

1

A

A

B

B

C

C

D

D