
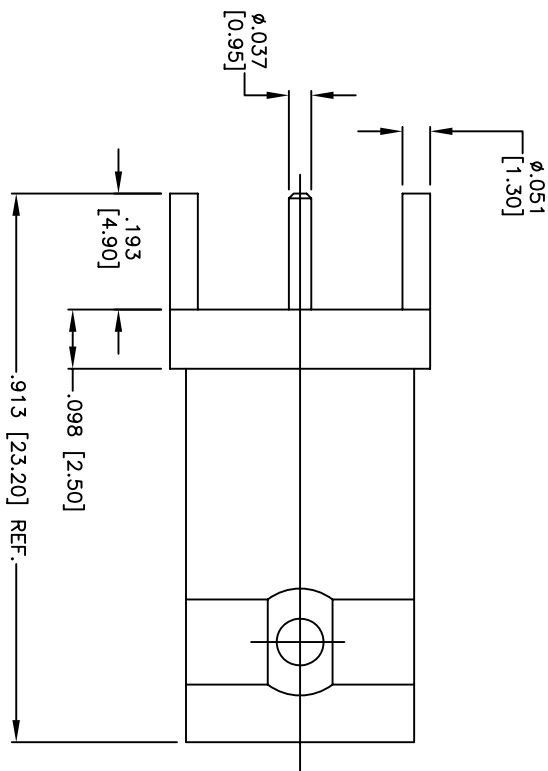


Rev	AWO #	Description	Date	Appr
-	-	RELEASED	3/20/07	

APPROVED: _____
 DATE: _____ TITLE: _____

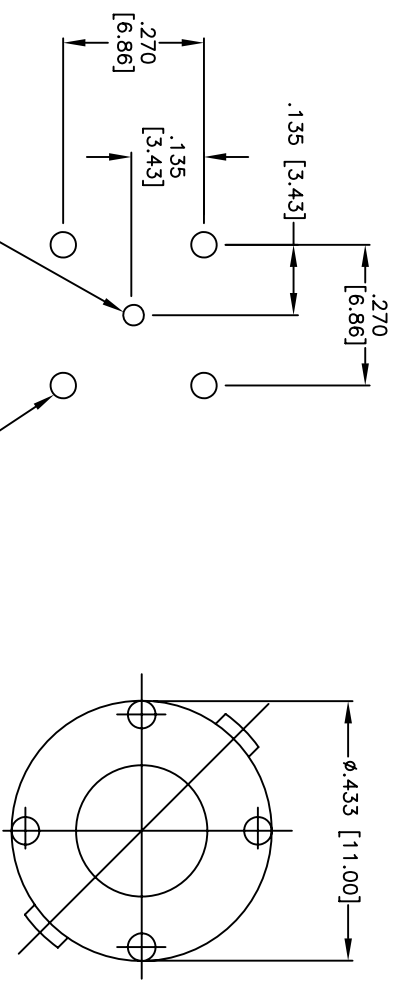

DESCRIPTION	MATERIAL	FINISH	QTY
BODY	ZINC	NICKEL	1
DIELECTRIC	TEFLON	NONE	1
CENTER PIN	BRASS	GOLD	1

ELECTRICAL SPECIFICATIONS:

Operation Voltage: 500 VAC max.
 Impedance: 75 ohms;
 Frequency Range: 0-4 GHz
 Contact Resistance: Inner: 3 mohms max. at DC 1A
 Insulation Resistance: 1000 Mohms (min.) @ 500 VDC
 Dielectric Withstanding Voltage: 1500 VAC (min.) rms
 VSWR: 1.2 max x .0-2GHz
 Interface Per MIL-C-39012C

ENVIRONMENTAL:

Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HILES
 .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

BNC CONNECTOR PCB MOUNT, 75 OHM

DRAWN	BW	3/20/07
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	RF1-07A-T-00-75	-
REF:	SCALE: NTS	SHEET 1 OF 1